

Specialized in Custom-made Neon Light

RAYMATES

Digital Neon Light



SHENZHEN RAYMATES ELECTRONIC CO., LTD

3-4F, NO. 161 Beihuan Rd, Shiyan Town, Baoan Area, Shenzhen City, China.

www.raymates.com
www.ledlighting-supplier.com

Contact for more details:



WhatsApp




WeChat



Specialized in Custom-made Neon Light

2 Series

22 Models



1 Top View Digital Neon Light Series

p1-22

RM-TN1010	P3-6	RM-TN1212	P7-8
RM-TN1515	P9-10	RM-TN1516	P11-12
RM-TN1614	P13-14	RM-TN1616	P15-16
RM-TN1716	P17-18	RM-TN2018	P19-22

2 Sign View Digital Neon Light Series

P23-48

RM-SN0612	P25-26	RM-SN0613	P27-28
RM-SN0815	P29-30	RM-0816	P31-32
RM-SN0817	P33-34	RM-SN1010	P35-36
RM-SN1018	P37-38	RM-SN1020	P39-40
RM-SN1022	P41-42	RM-SN1225	P43-44
RM-SN1515	P45-46	RM-1616	P47-48

TOP View Digital Neon Light Series


- | | | | |
|-----------|-----------|-----------|-----------|
| RM-TN1010 | RM-TN1212 | RM-TN1515 | RM-TN1516 |
| RM-TN1614 | RM-TN1616 | RM-TN1716 | RM-TN2018 |



Application




TN1010 Extrusion Digital Neon Light

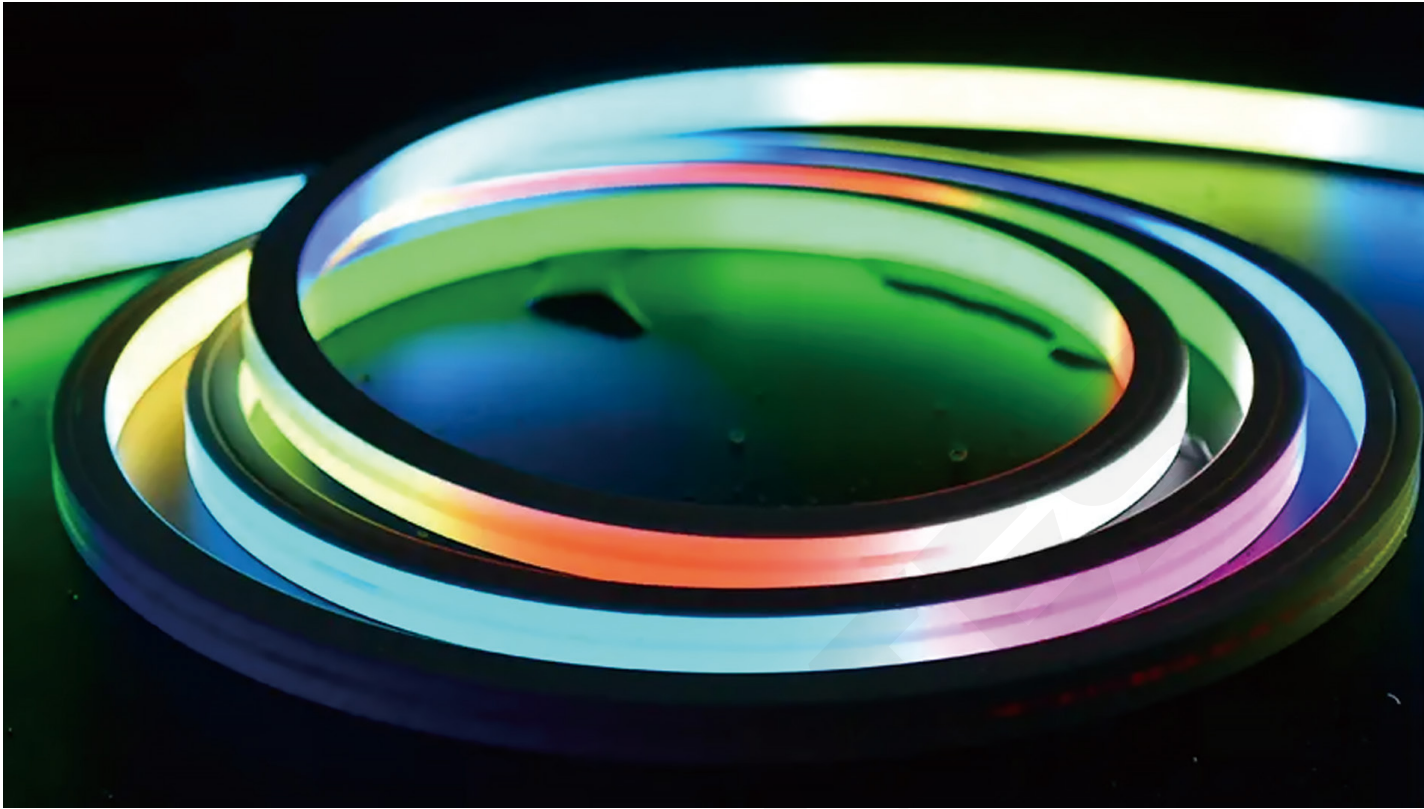


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 75.3LM G: 198.7LM B: 34.8LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 64.0LM G: 168.4LM B: 29.5LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 64.0LM G: 168.4LM B: 29.5LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 60.3LM G: 158.7LM B: 27.9LM W:357.7LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 53.1LM G: 139.4LM B: 24.6LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 30.1LM G: 79.5LM B: 13.9LM W: 357.7LM	16.67mm


Dimension

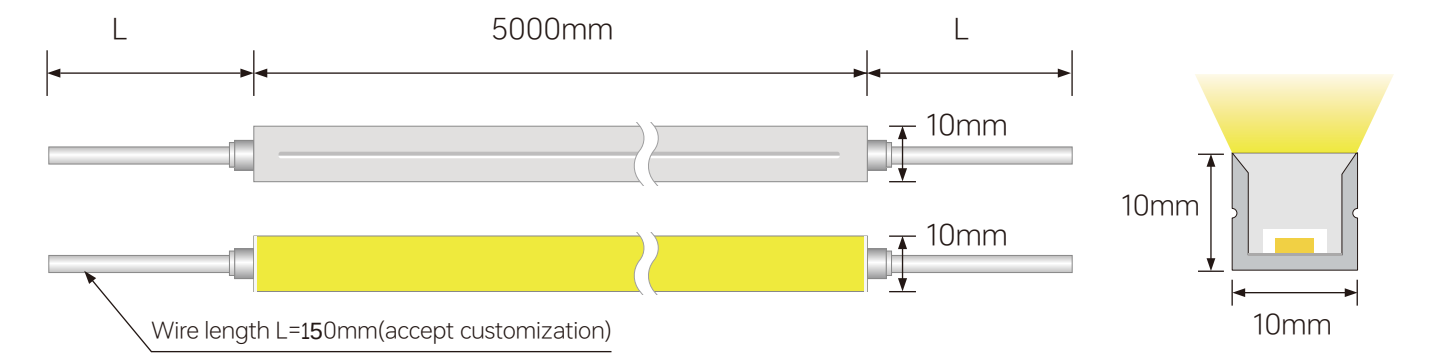


Bending

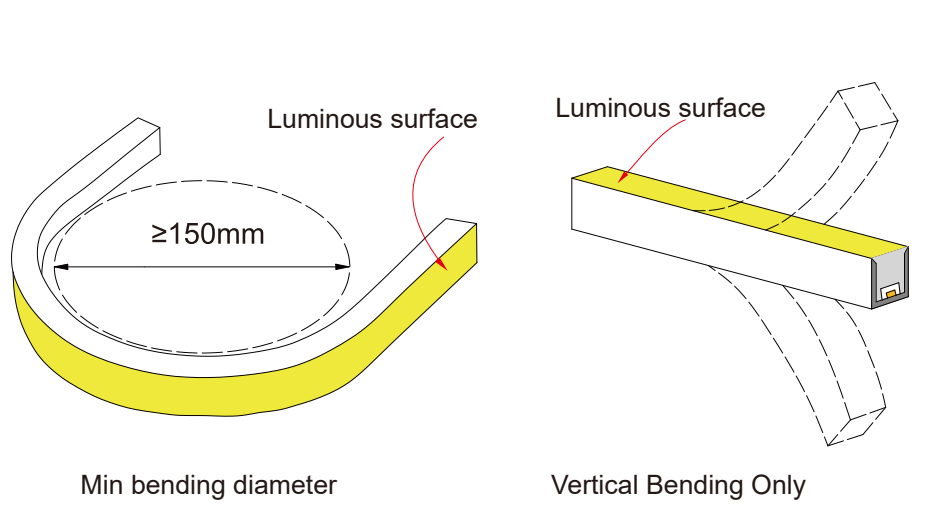


Outlet Direction

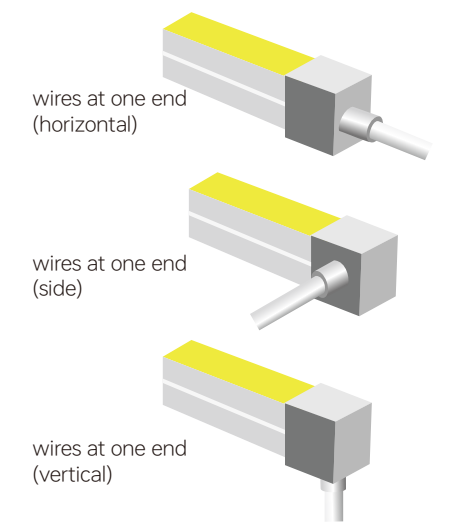

Accessories

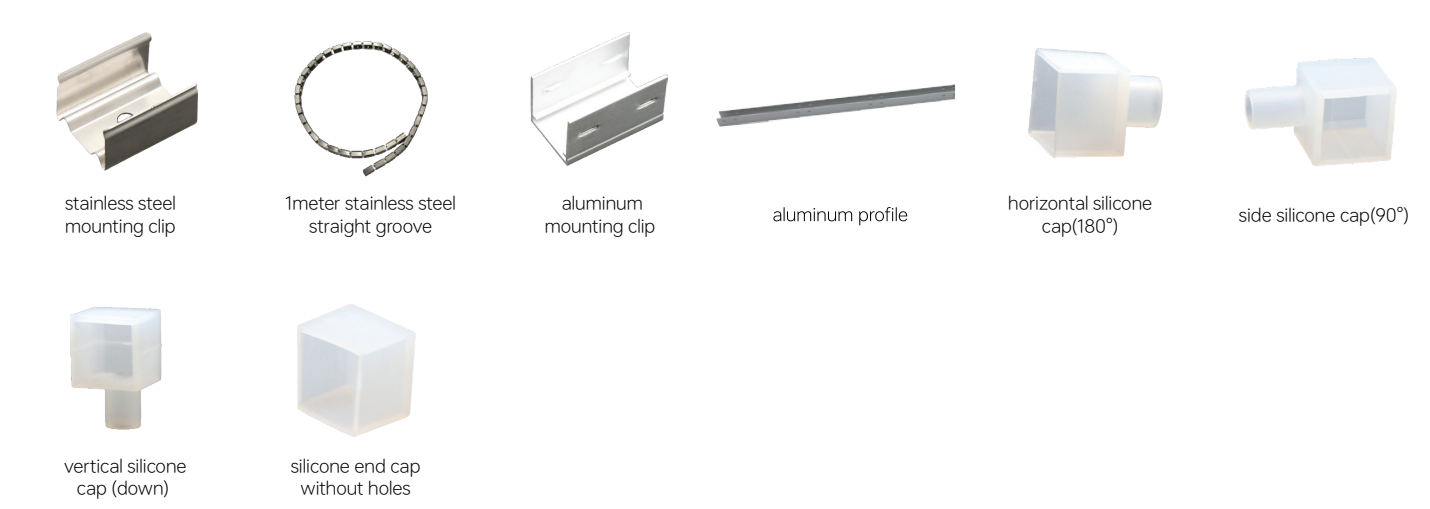


TN1010 Extrusion Digital Neon Light-Three sides light

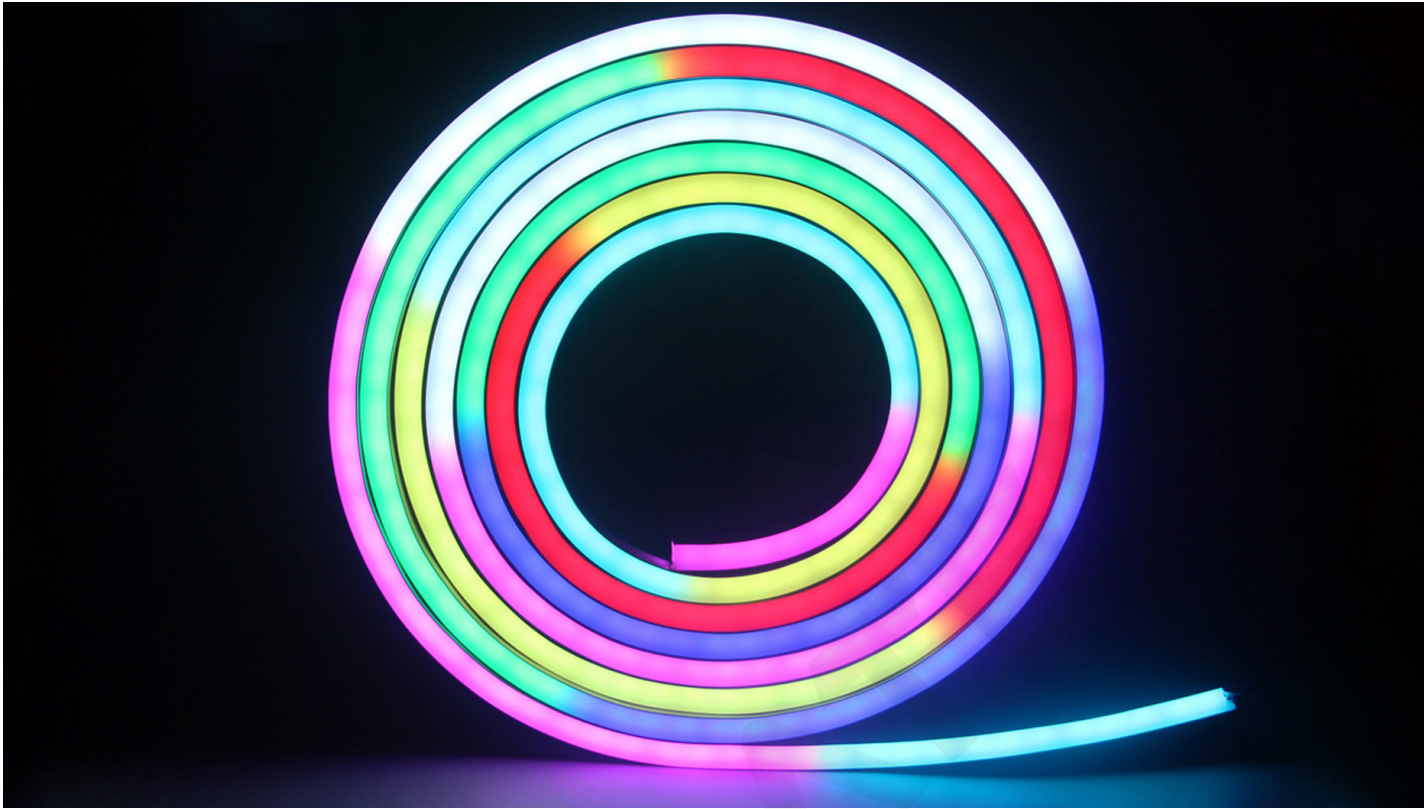


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 79.1LM G: 208.7LM B: 36.5LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 67.2LM G: 176.8LM B: 31.0LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 67.2LM G: 176.8LM B: 31.0LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 63.3LM G: 166.6LM B: 29.3LM W: 375.6LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 55.8LM G: 146.3LM B: 25.8LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 31.6LM G: 83.5LM B: 14.6LM W: 375.6LM	16.67mm


Dimension

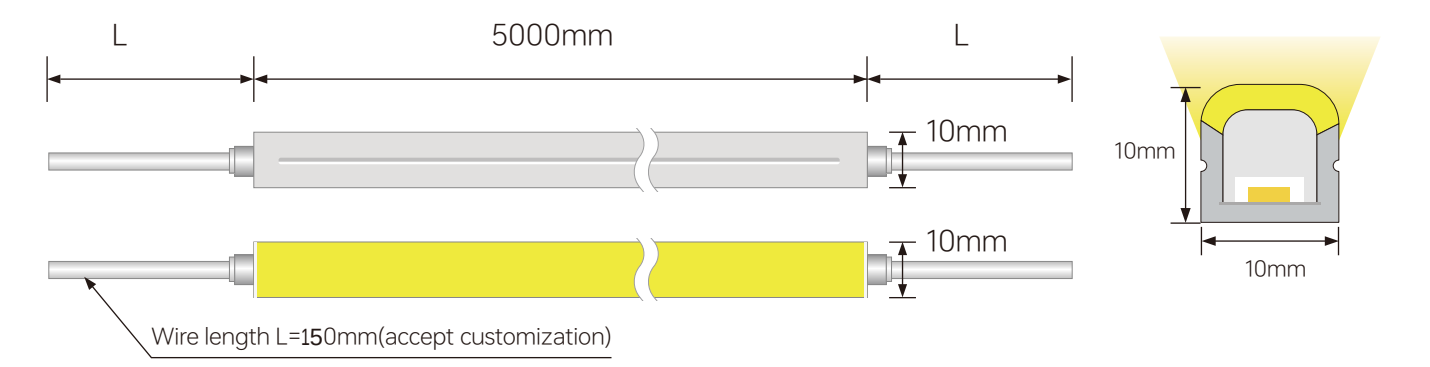


Bending

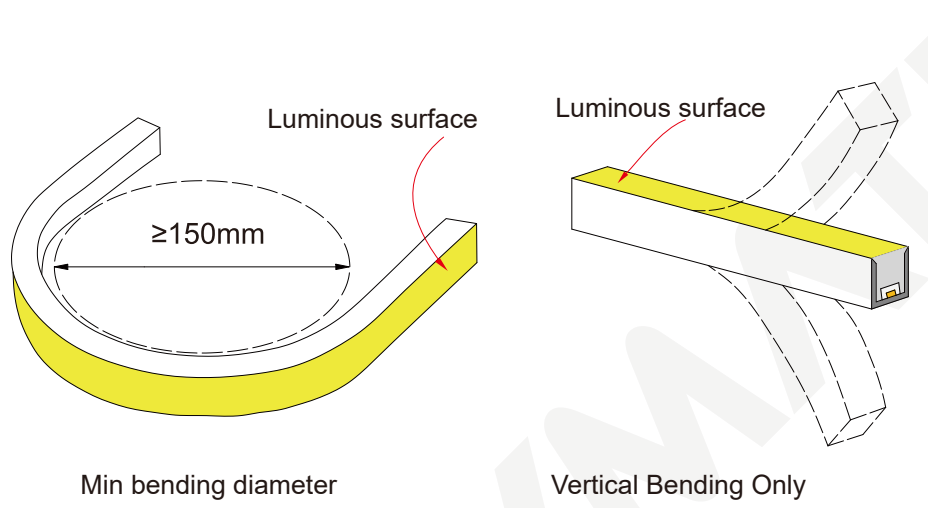


Outlet Direction

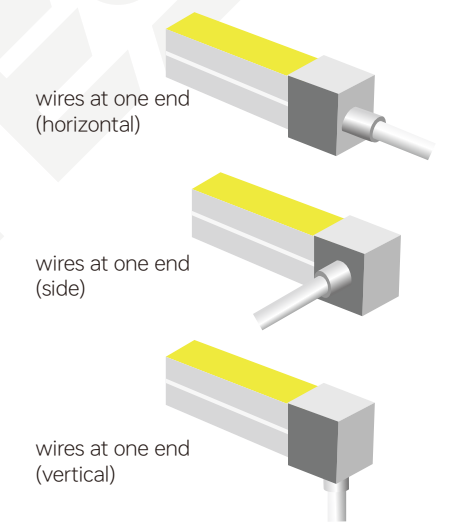

Accessories

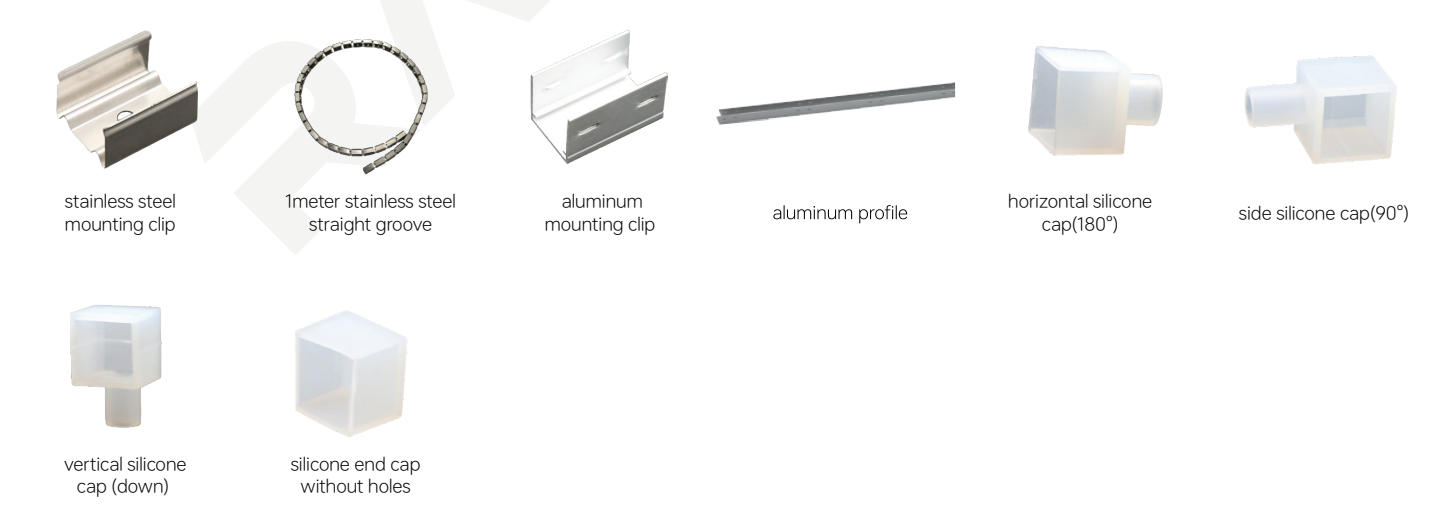


TN1212 Extrusion Digital Neon Light

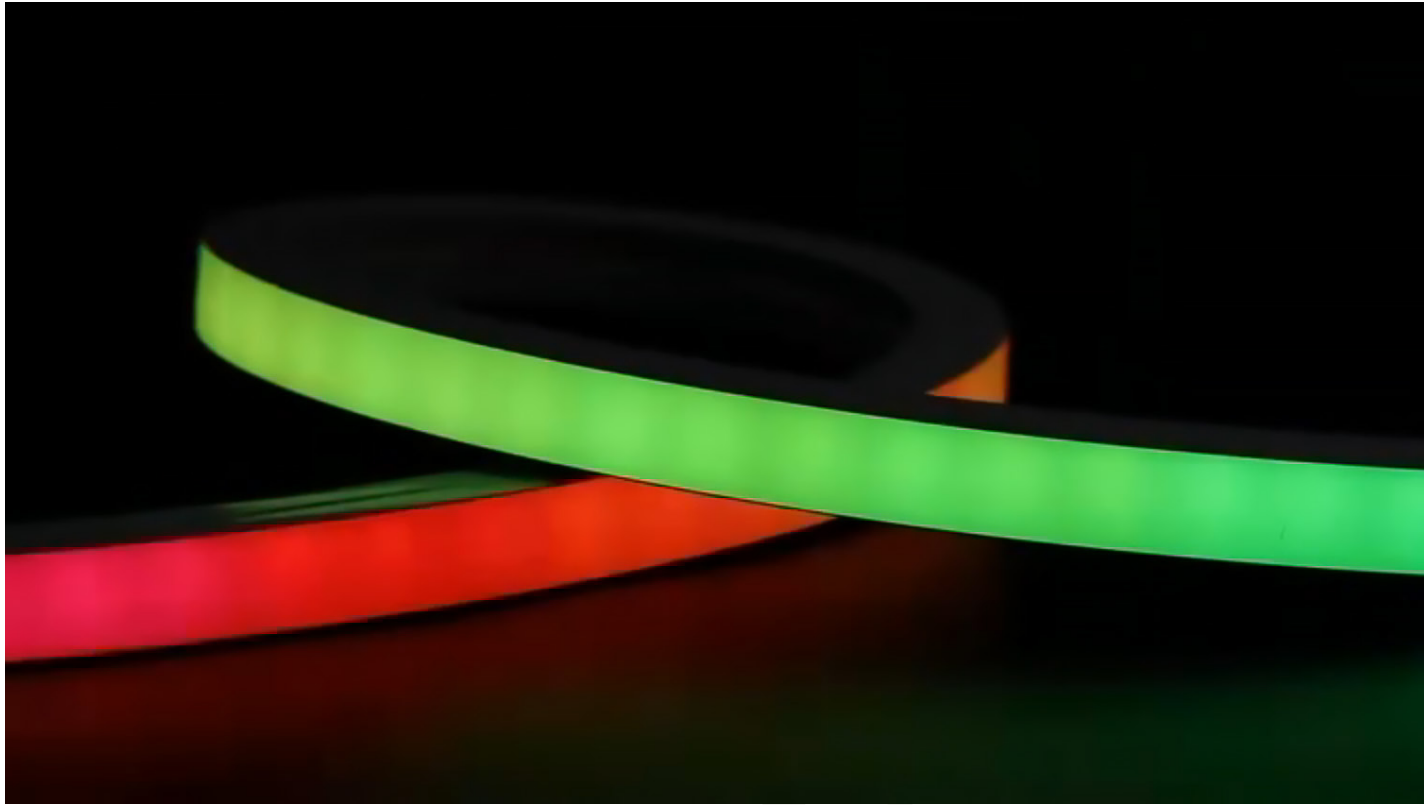


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 71.6LM G: 188.8LM B: 33.0LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 60.8LM G: 159.9LM B: 28.1LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 60.8LM G: 159.9LM B: 28.1LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 57.3LM G: 150.8LM B: 26.5LM W: 339.8LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 50.5LM G: 132.4LM B: 23.3LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 28.6LM G: 75.5LM B: 13.2LM W: 339.8LM	16.67mm


Dimension

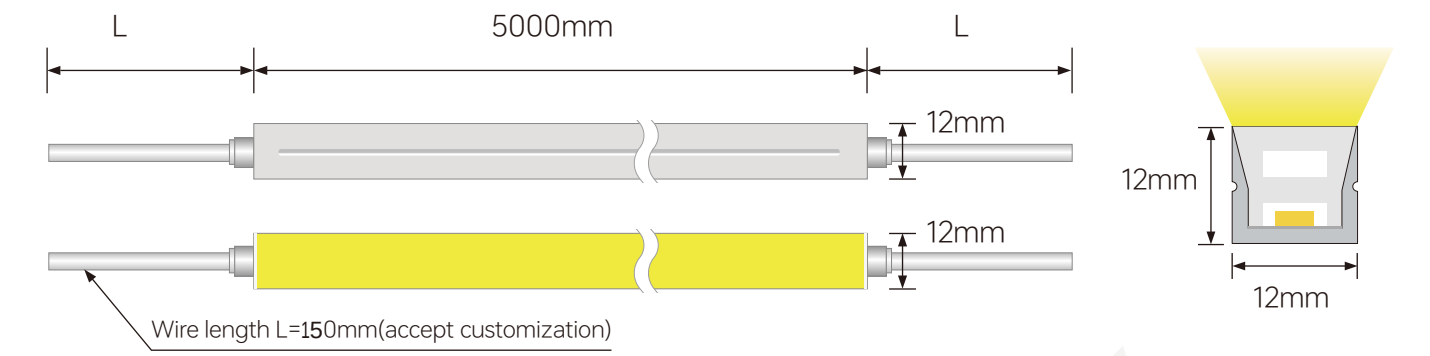

Bending

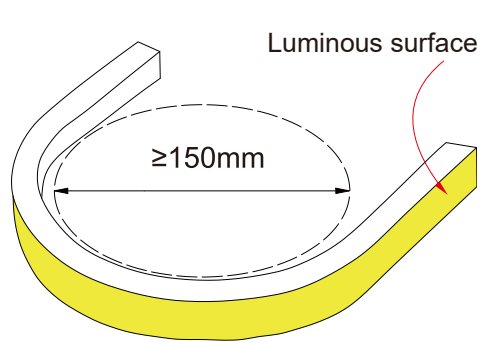


Min bending diameter

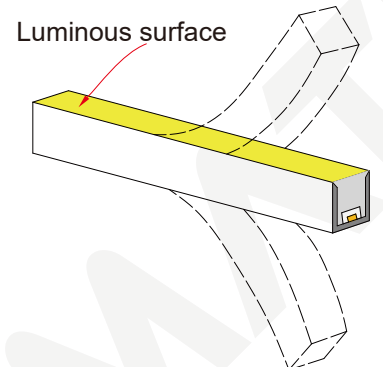


Vertical Bending Only


Outlet Direction



Accessories

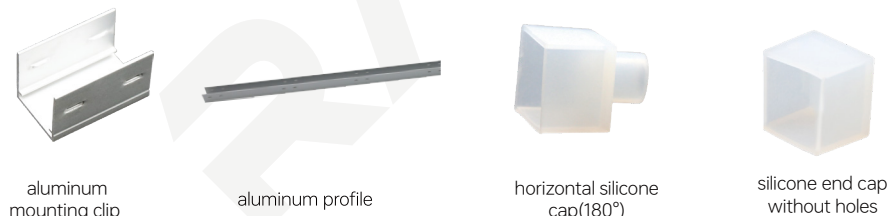


TN1515 Extrusion Digital Neon Light

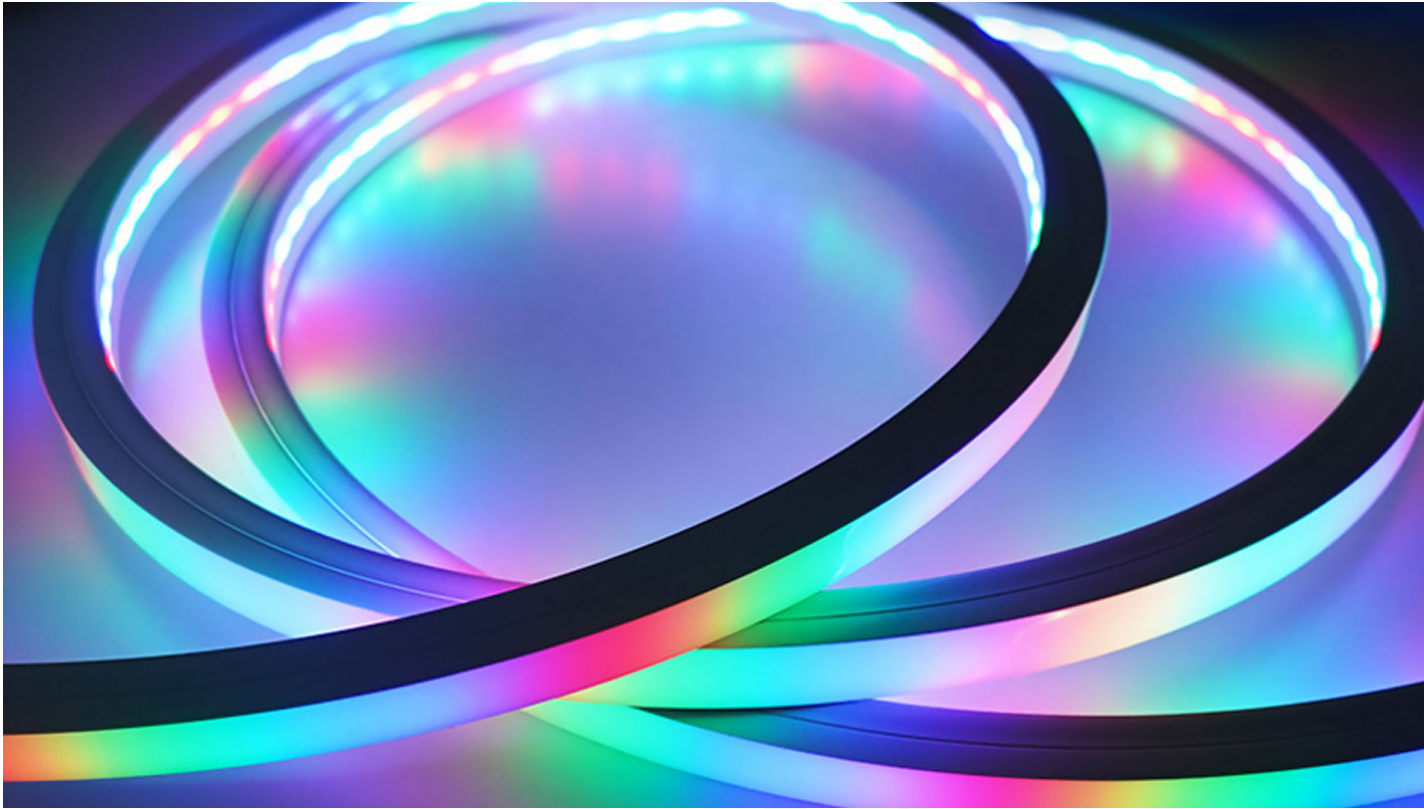


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 67.8LM G: 178.8LM B: 31.3LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 57.6LM G: 151.5LM B:26.6LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 57.6LM G: 151.5LM B: 26.6LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 54.3LM G: 142.8LM B: 25.1LM W: 321.9LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 47.8LM G: 125.4LM B:22.1LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 27.1LM G: 71.5LM B: 12.5LM W: 321.9LM	16.67mm


Dimension

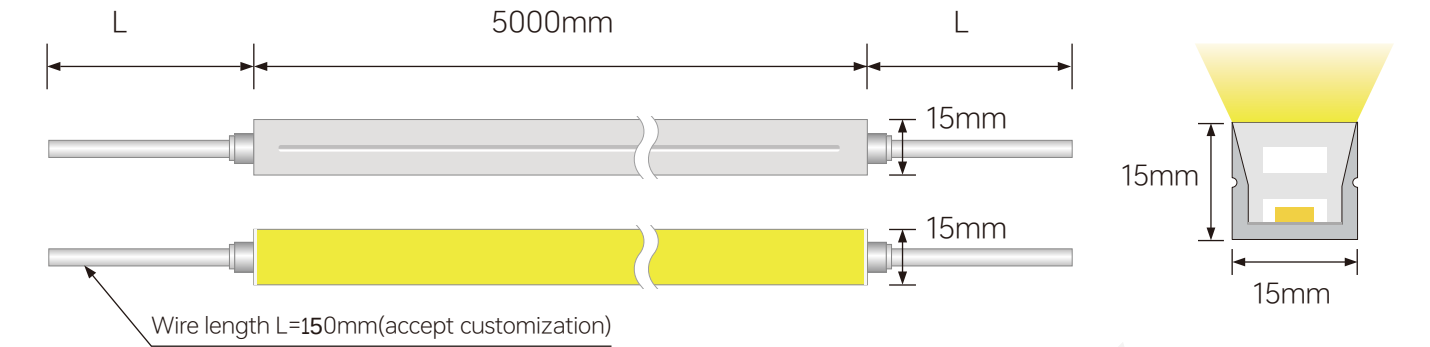


Bending

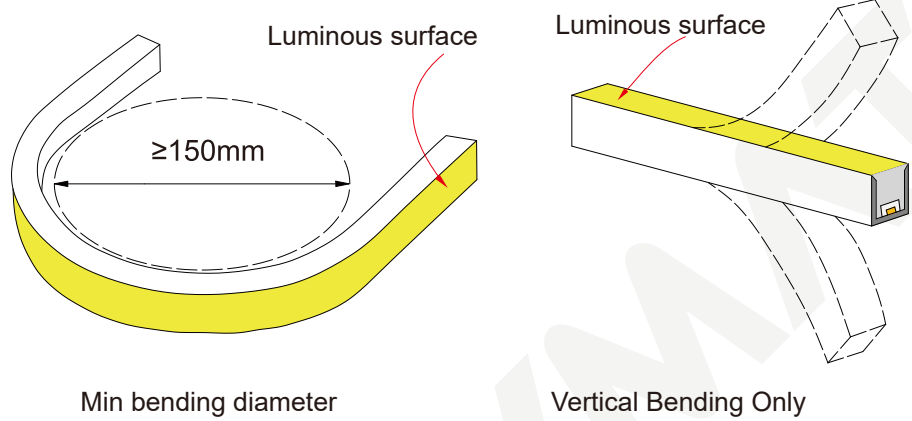

Outlet Direction

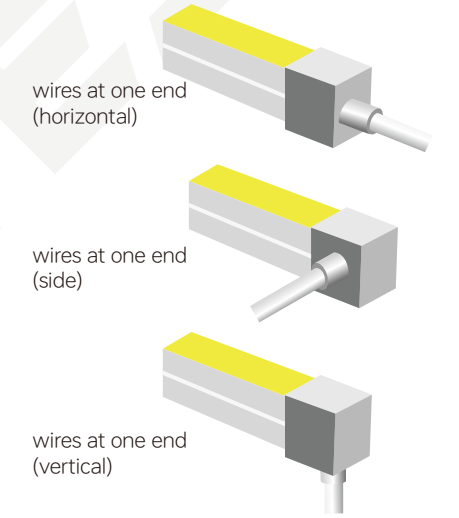

Accessories

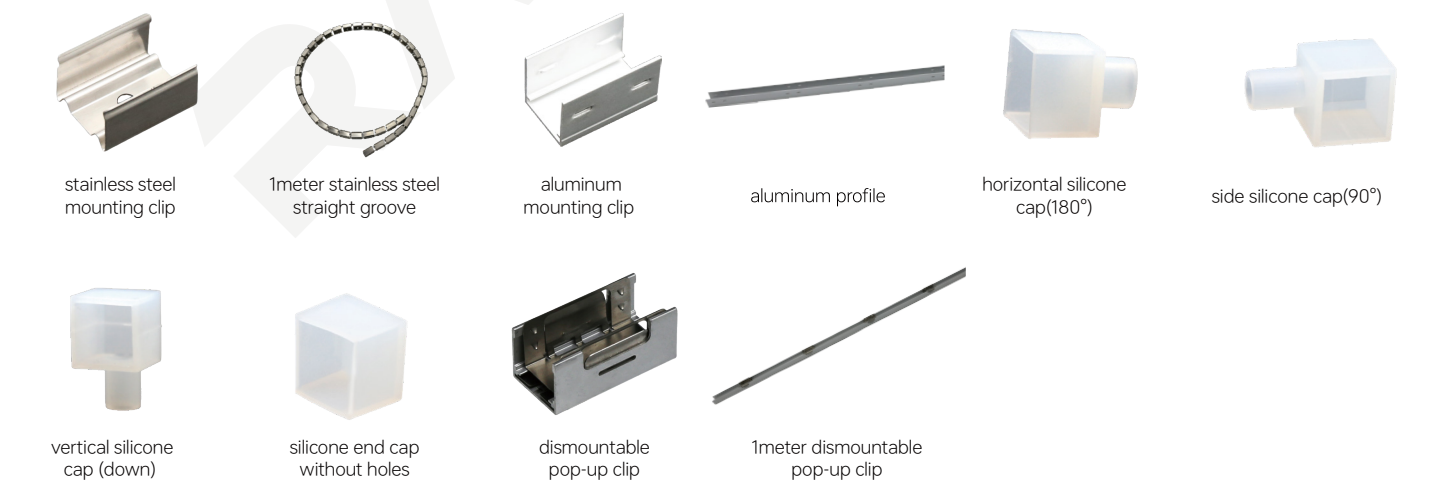


TN1516 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 67.8LM G: 178.8LM B: 31.3LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 57.6LM G: 151.5LM B: 26.6LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 57.6LM G: 151.5LM B: 26.6LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 54.3LM G: 142.8LM B: 25.1LM W: 321.9LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 47.8LM G: 125.4LM B: 22.1LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 27.1LM G: 71.5LM B: 12.5LM W: 321.9LM	16.67mm


Dimension

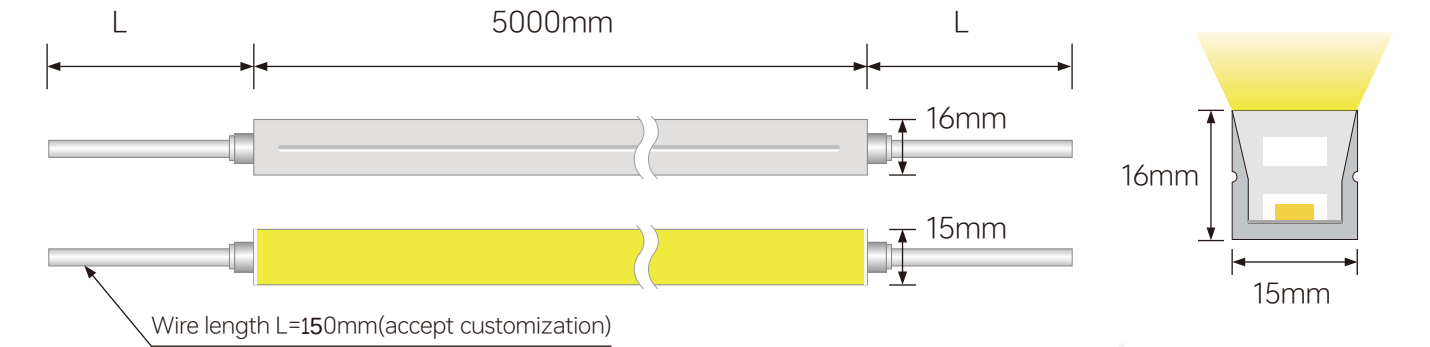


Bending

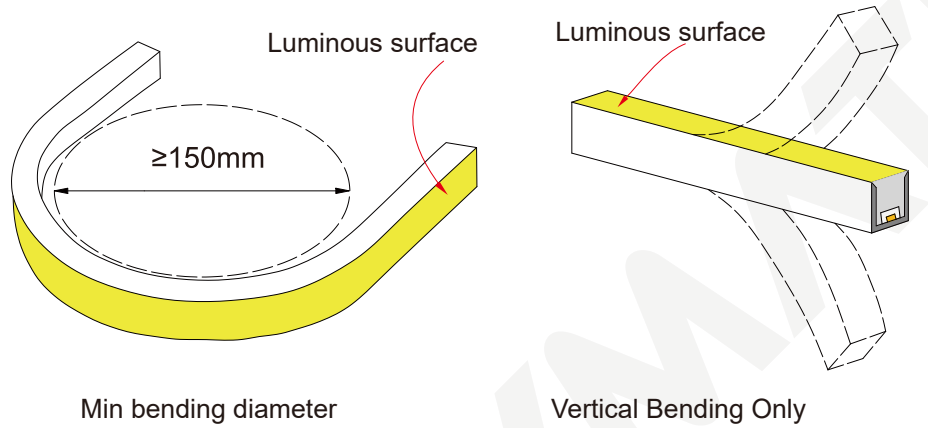

Outlet Direction

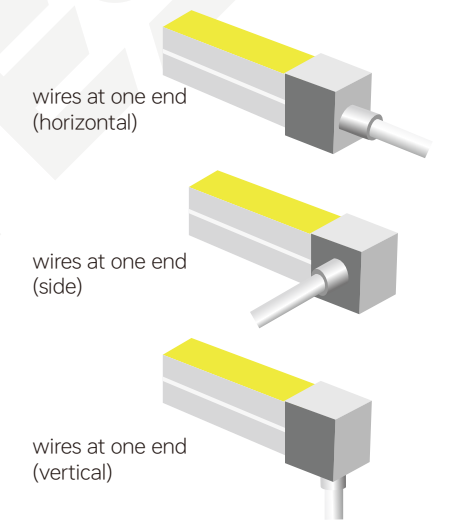

Accessories

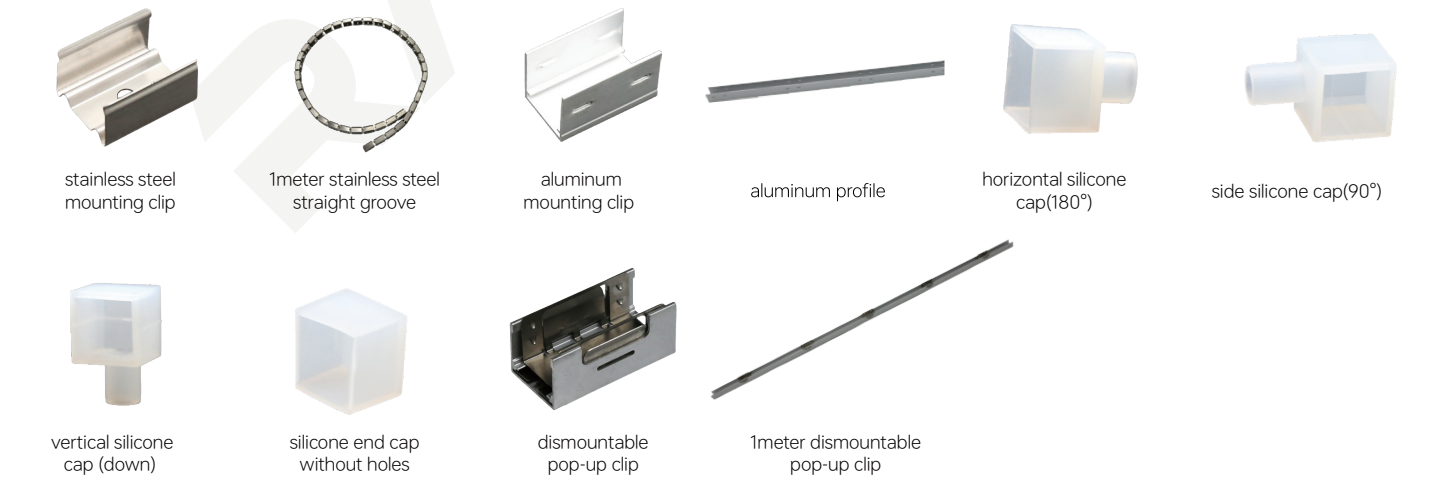


TN1614 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 84.4LM G: 222.6LM B: 38.9LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 71.7LM G: 188.6LM B: 33.1LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 71.7LM G: 188.6LM B: 33.1LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 67.5LM G: 177.7LM B: 31.2LM W: 400.6LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 59.5LM G: 156.1LM B: 27.5LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 33.7LM G: 89.0LM B: 15.6LM W: 400.6LM	16.67mm

Dimension

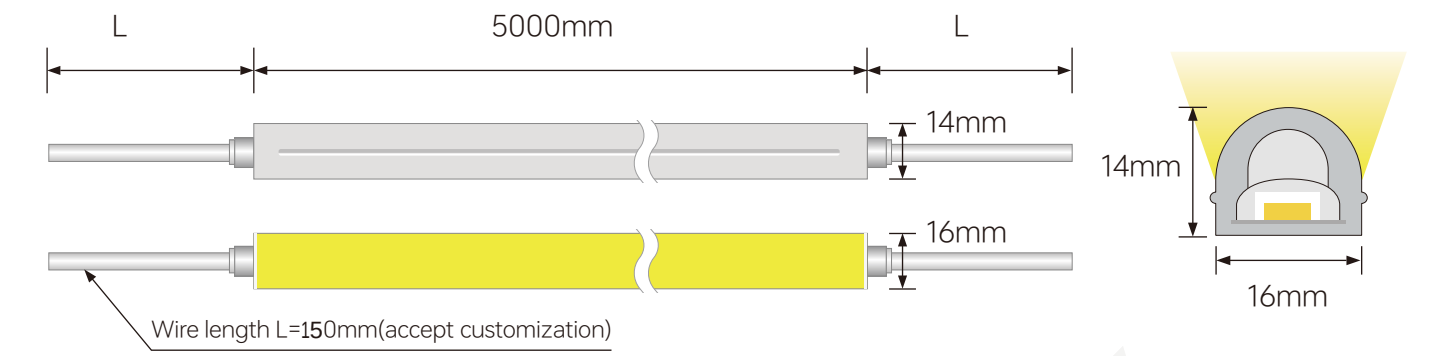


Bending


Outlet Direction

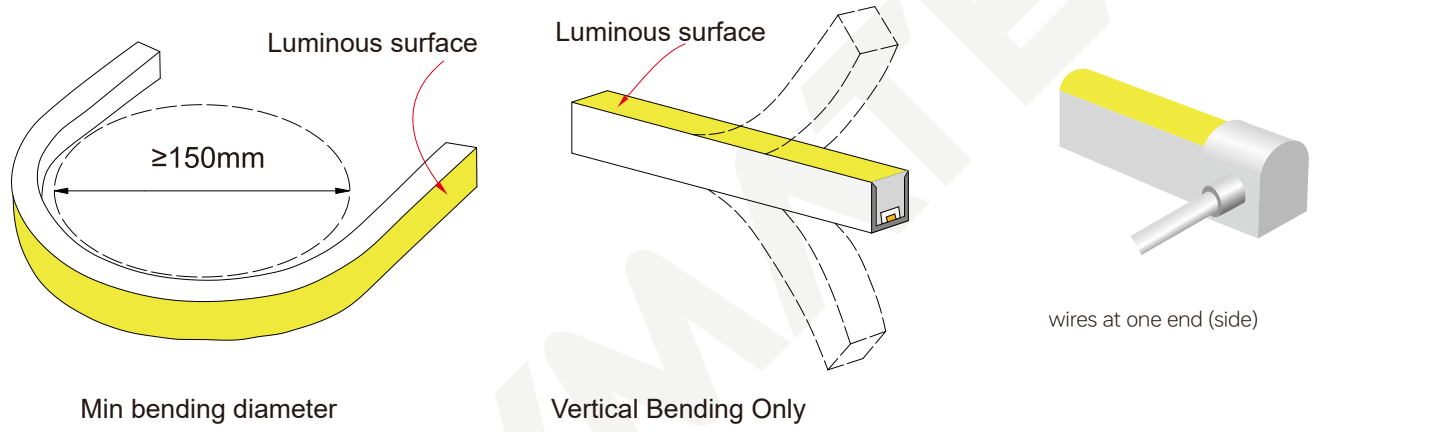

Accessories

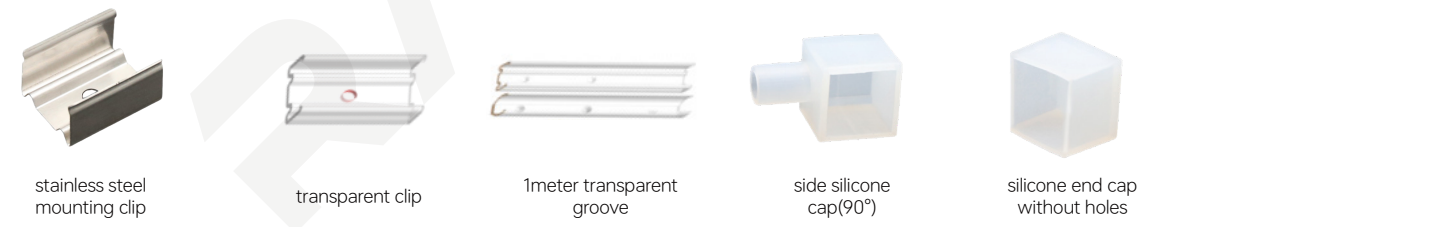


TN1616 Extrusion Digital Neon Light

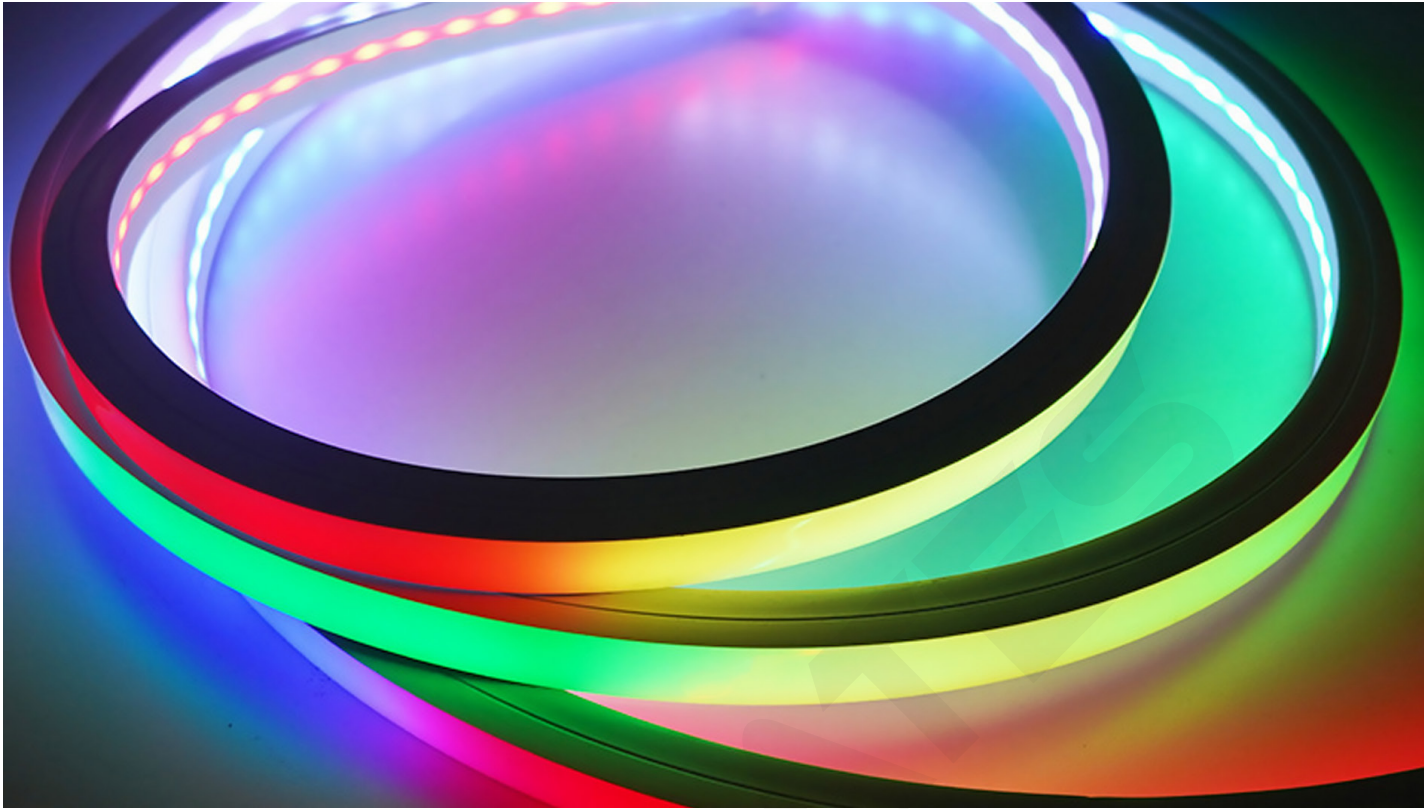


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 66.3LM G: 174.9LM B: 30.6LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 56.3LM G: 148.2LM B: 26.0LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 56.3LM G: 148.2LM B: 26.0LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 53.1LM G: 139.7LM B: 24.5LM W: 314.8LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 46.8LM G: 122.7LM B: 21.6LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 26.5LM G: 69.9LM B: 12.3LM W: 314.8LM	16.67mm


Dimension

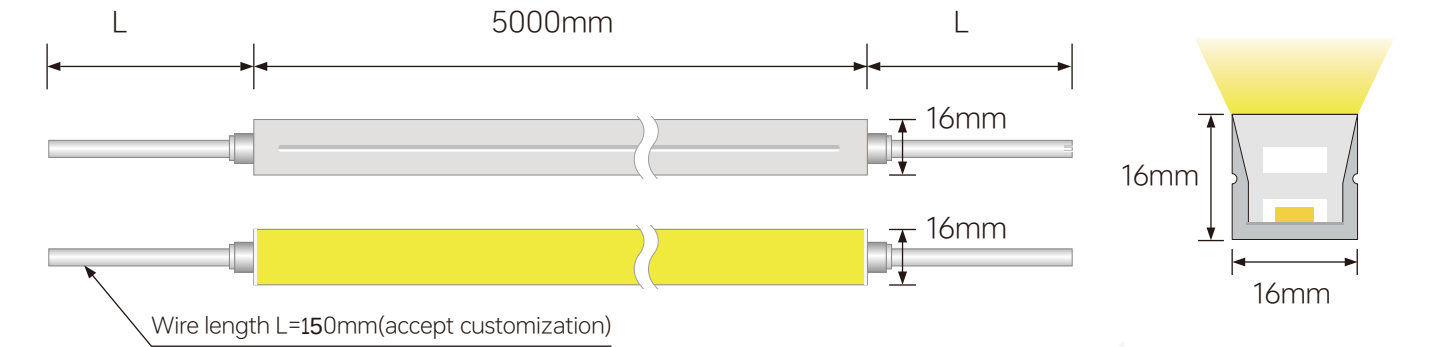


Bending

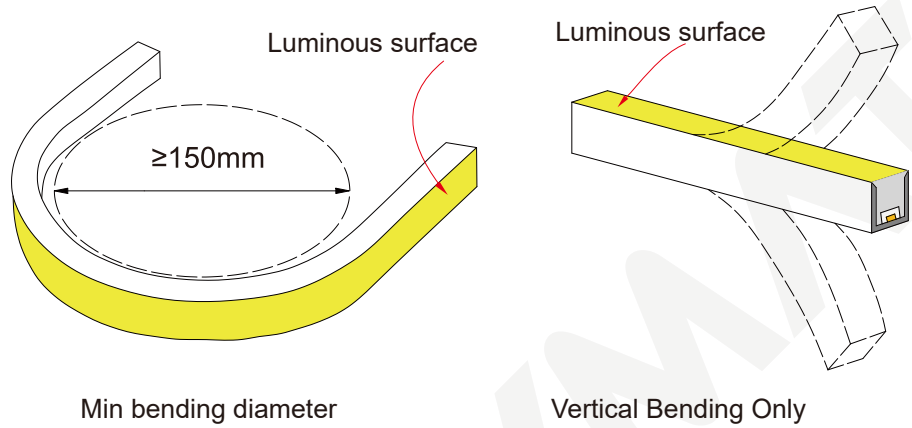

Outlet Direction

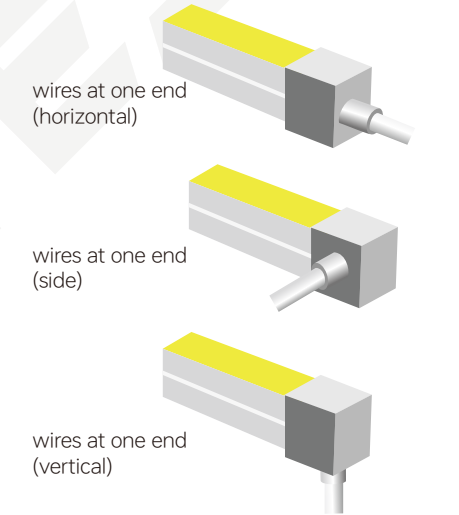

Accessories

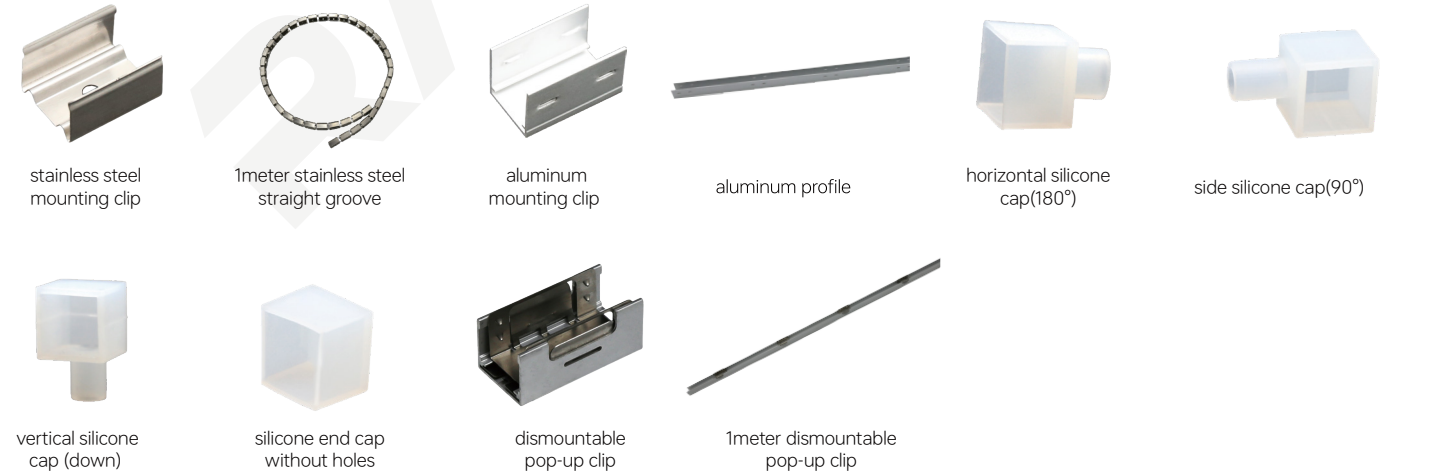


TN1716 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 81.4LM G: 214.6LM B: 37.6LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 69.2LM G: 181.8LM B: 31.9LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 69.2LM G: 181.8LM B: 31.9LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 65.1LM G: 171.4LM B: 30.1LM W: 386.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 57.4LM G: 150.5LM B: 26.5LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 32.5LM G: 85.8LM B: 15.1LM W: 386.3LM	16.67mm

Dimension

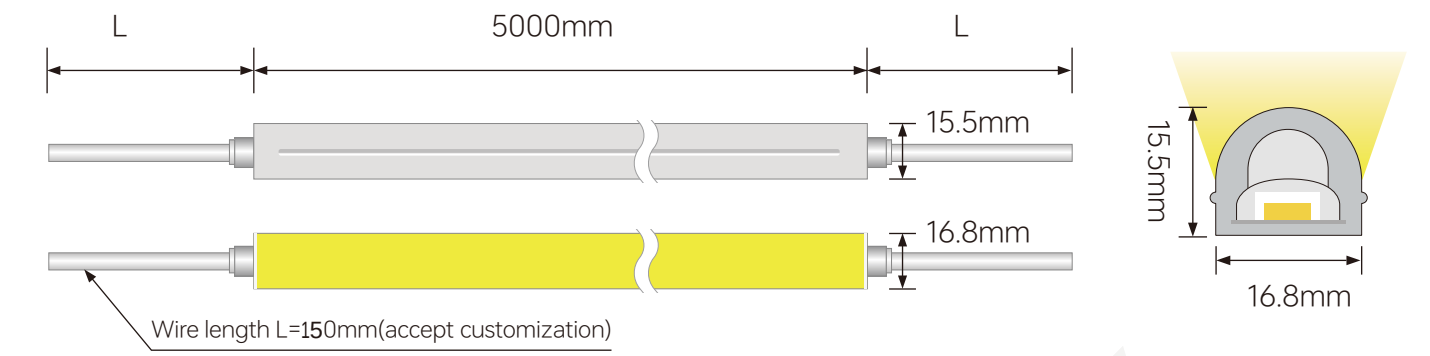


Bending


Outlet Direction

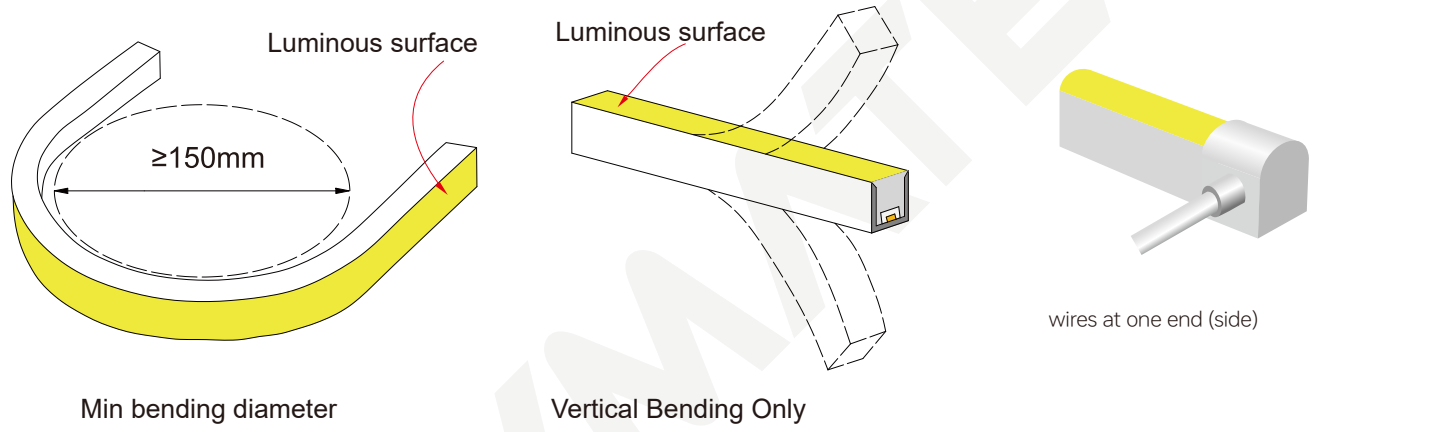

Accessories

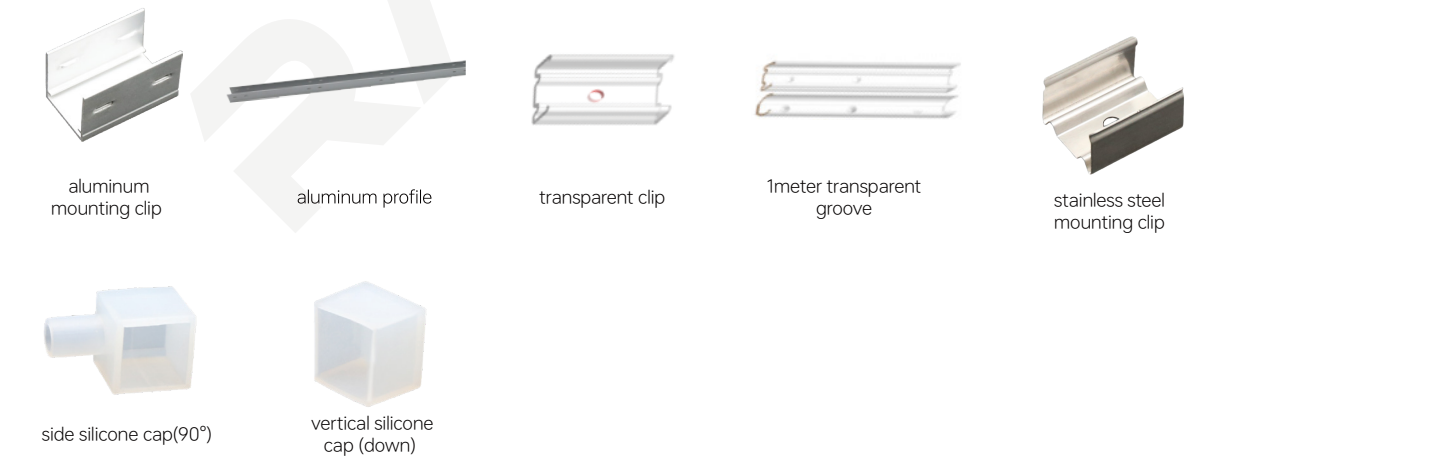


TN2018 Extrusion Digital Neon Light

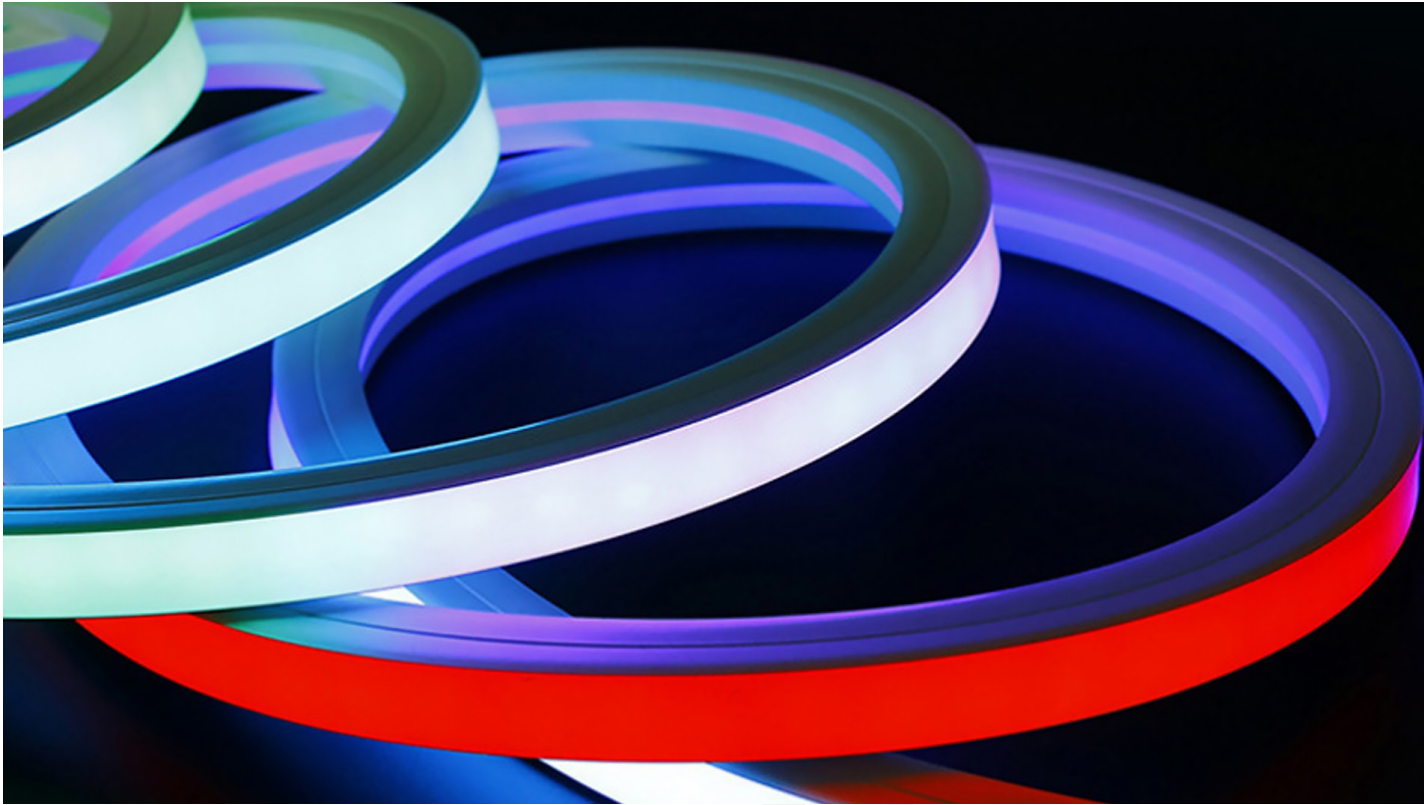


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 60.3LM G: 159.0LM B: 27.8LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 51.2LM G: 134.7LM B: 23.6LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 51.2LM G: 134.7LM B: 23.6LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 48.2LM G: 127.0LM B: 22.3LM W: 286.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 42.5LM G: 111.5LM B: 19.7LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 24.1LM G: 63.6LM B: 11.2LM W: 286.2LM	16.67mm


Dimension

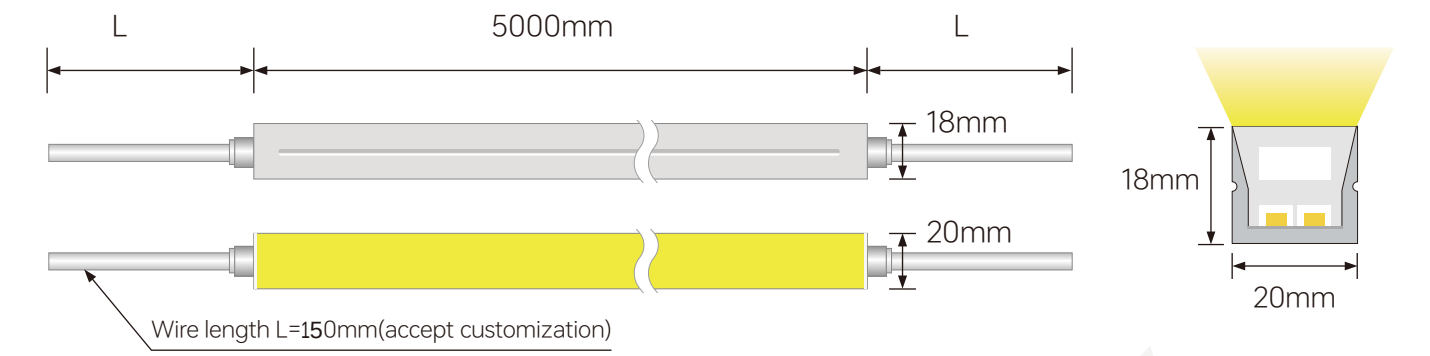


Bending

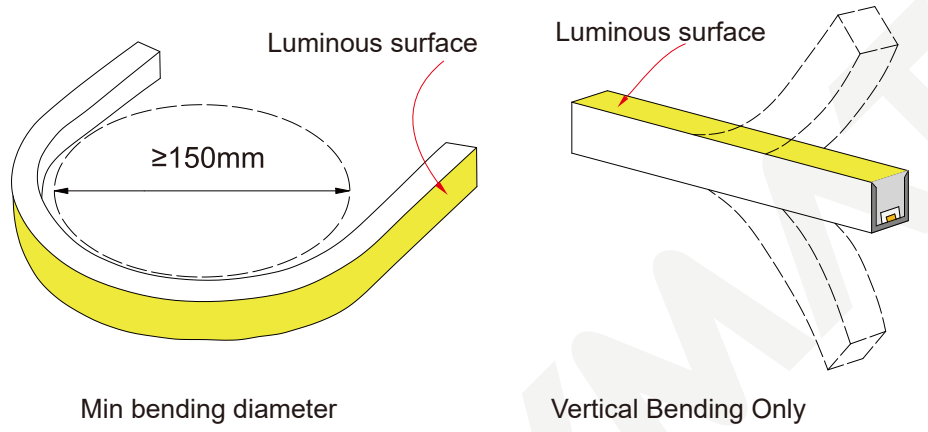

Outlet Direction

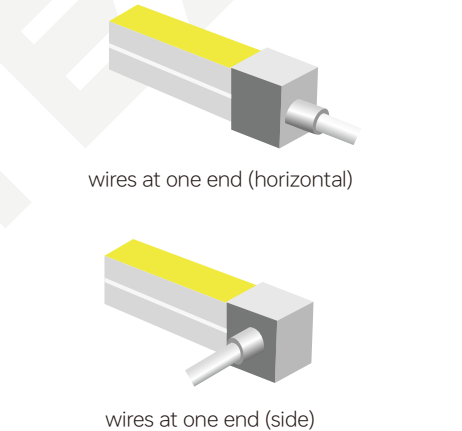

Accessories

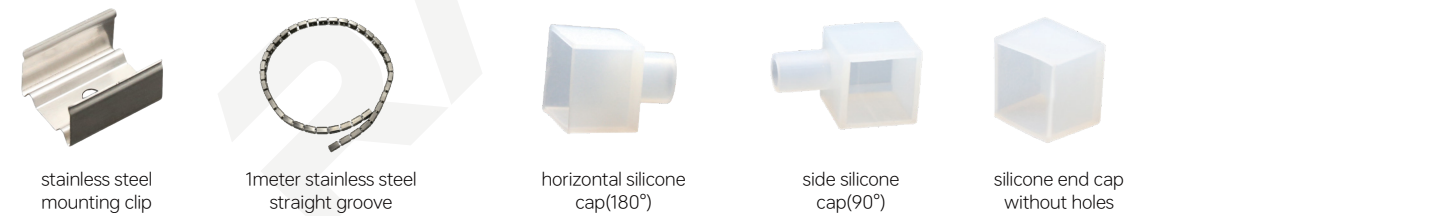


TN2018 Extrusion Digital Neon Light-Three sides light





Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 621LM G: 163.7LM B: 28.7LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 52.8LM G: 138.7LM B: 24.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 52.8LM G: 138.7LM B: 24.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 49.7LM G: 130.8LM B: 23.0LM W: 294.7LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 43.8LM G: 114.8LM B: 20.2LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 24.8LM G: 65.5LM B: 11.5LM W: 294.7LM	16.67mm


Dimension

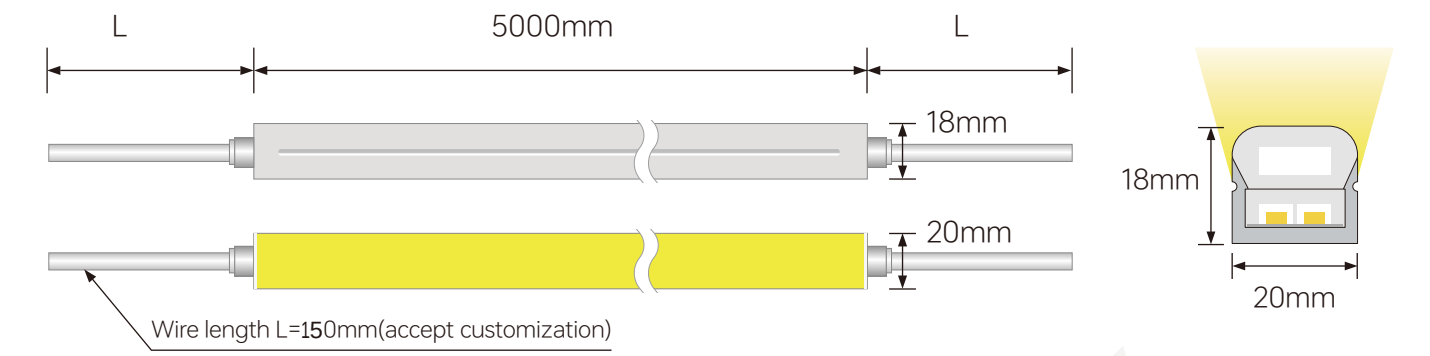


Bending

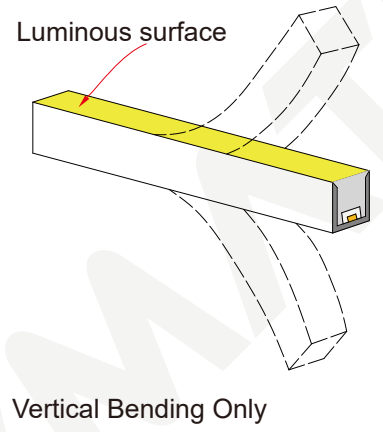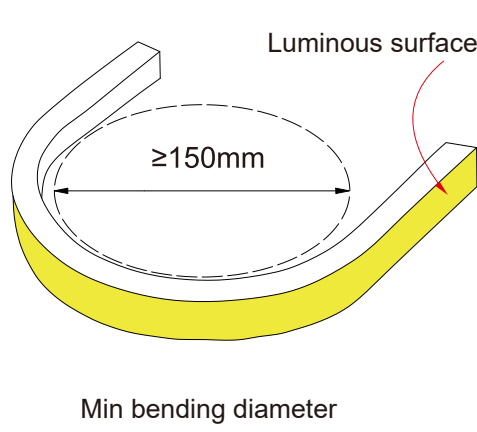

Outlet Direction

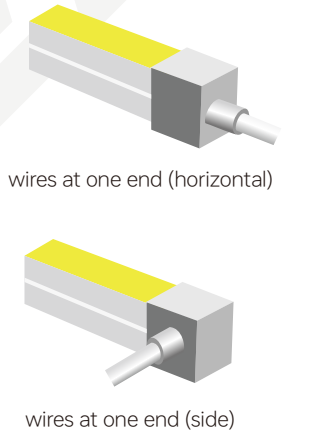

Accessories

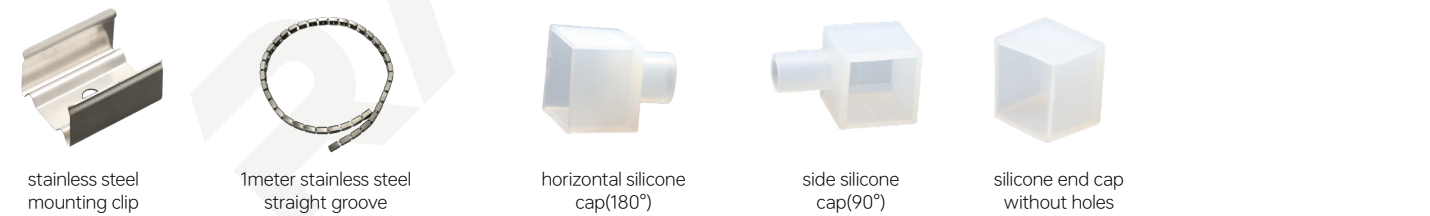


Sign View Digital Neon Light Series



RM-SN0612	RM-SN0613	RM-SN0815	RM-SN0816
RM-SN0817	RM-SN1010	RM-SN1018	RM-SN1020
RM-SN1022	RM-SN1225	RM-SN1515	RM-SN1616



Application

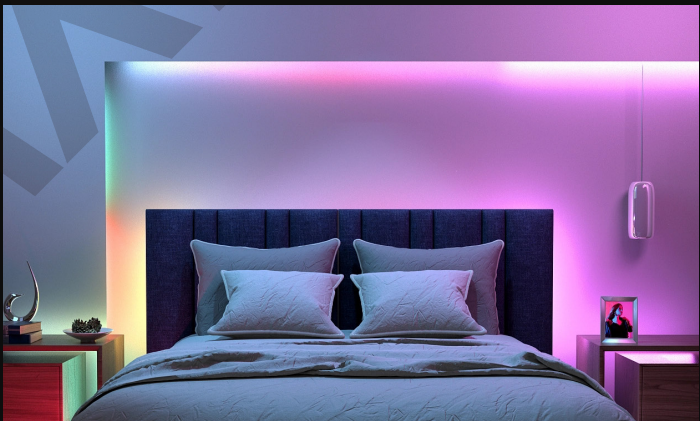


SN0612 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 54.6LM G: 144LM B: 25.2LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 43.7LM G: 115LM B: 20.2LM W: 259.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 38.5LM G: 101LM B: 17.8LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 21.8LM G: 57.6LM B: 10.1LM W: 259.2LM	16.67mm


Dimension

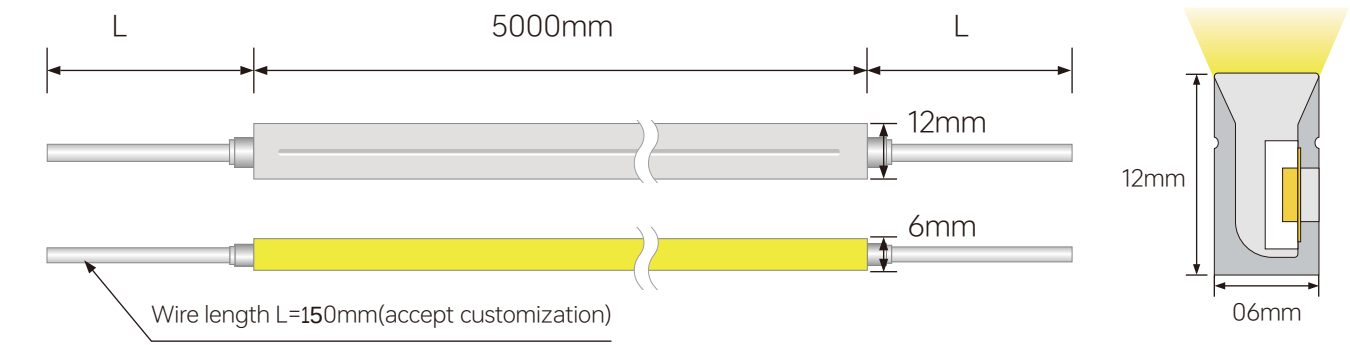


Bending

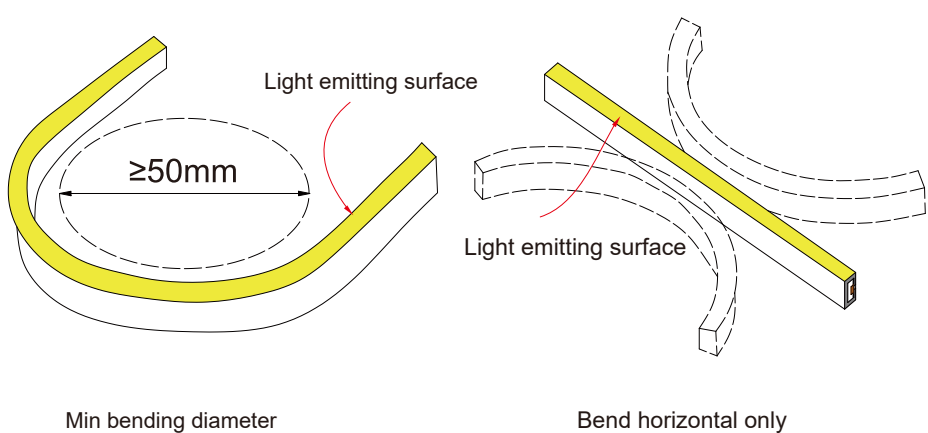


Outlet Direction

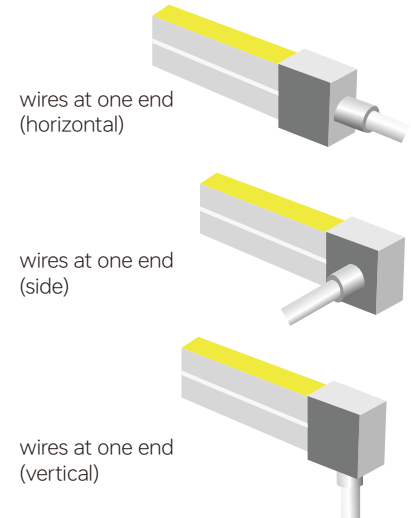

Accessories

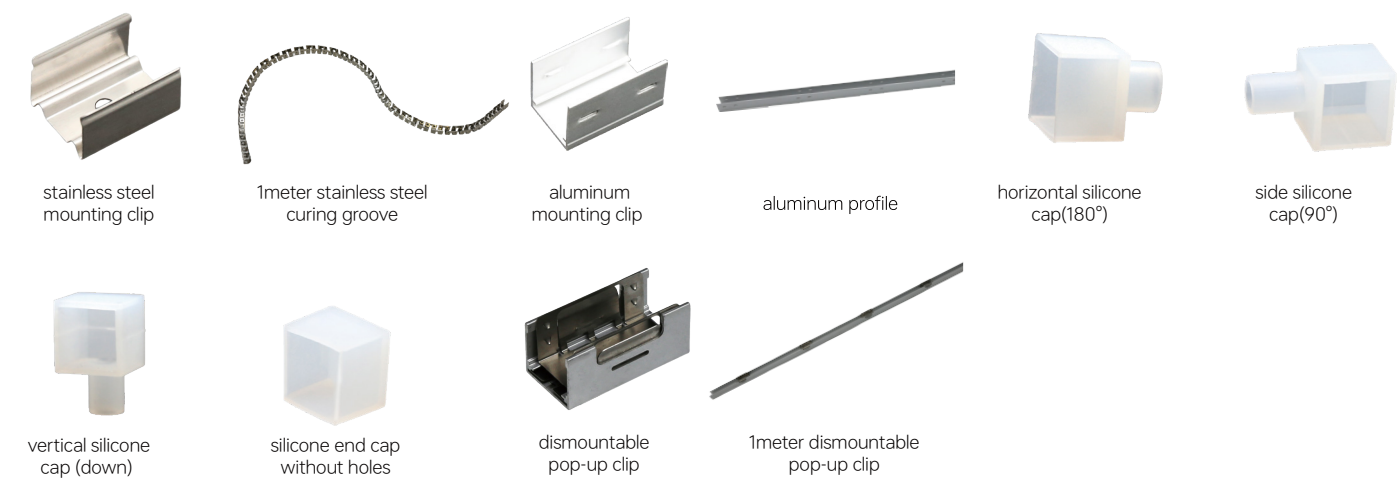


SN0613 Extrusion Digital Neon Light

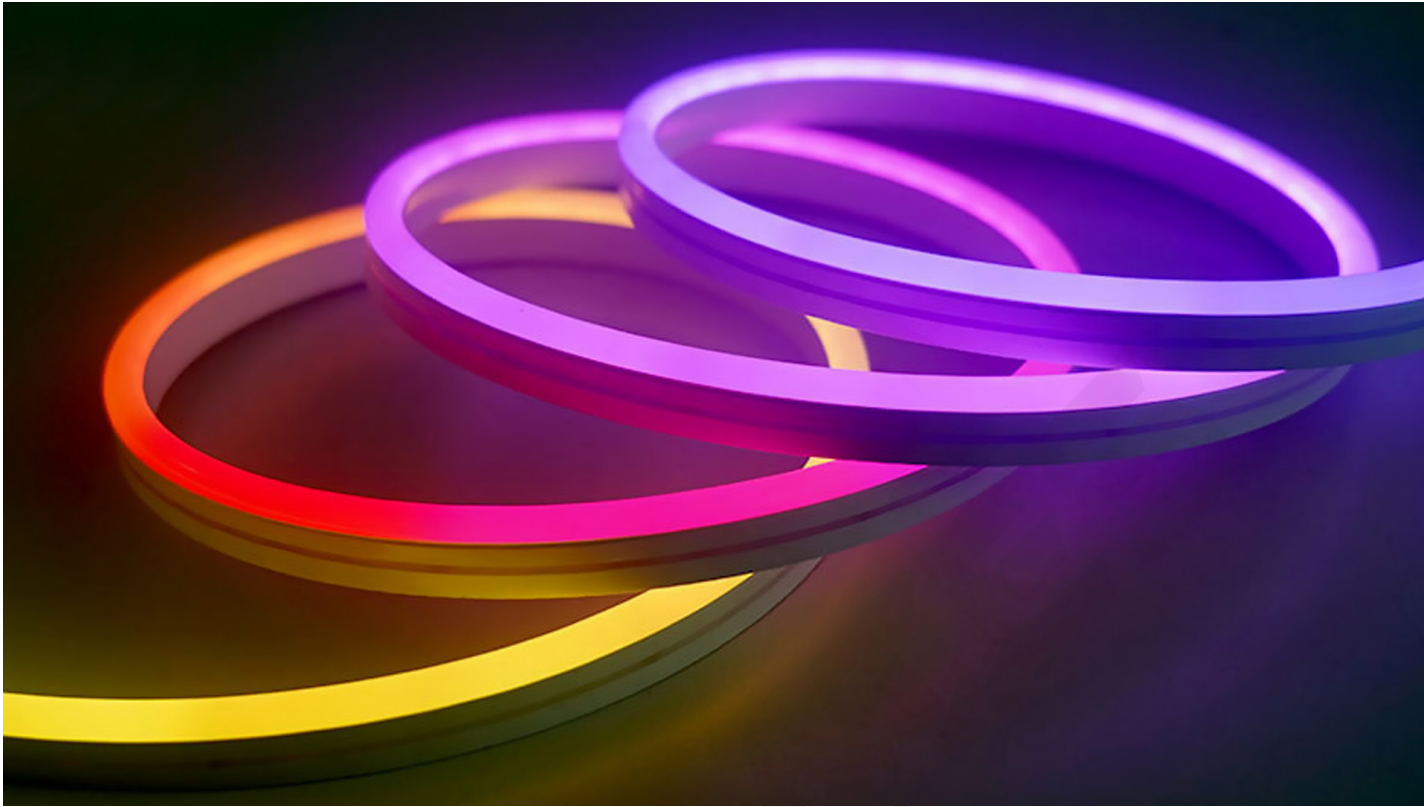


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 54.6LM G: 144LM B: 25.2LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 43.7LM G: 115LM B: 20.2LM W: 259.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 38.5LM G: 101LM B: 17.8LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 21.8LM G: 57.6LM B: 10.1LM W: 259.2LM	16.67mm


Dimension

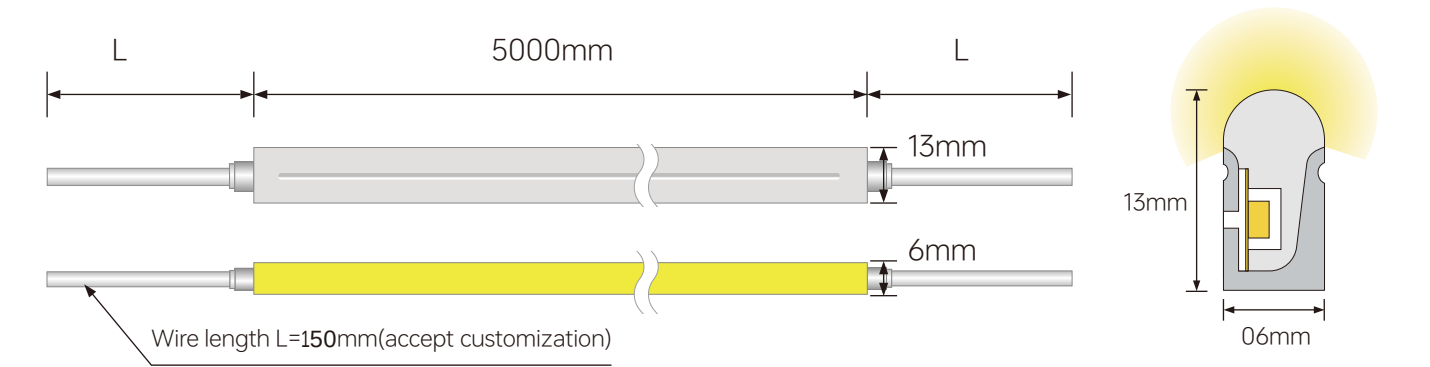


Bending

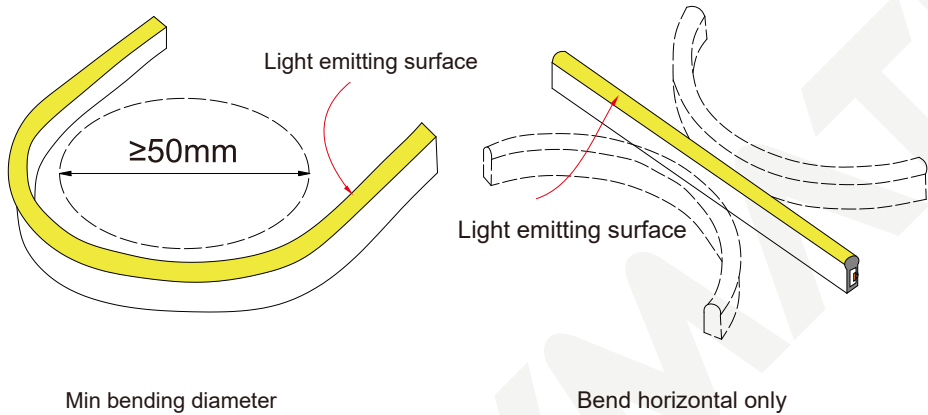


Outlet Direction

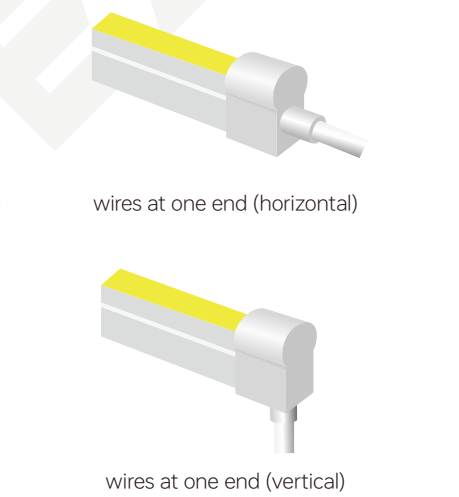

Accessories

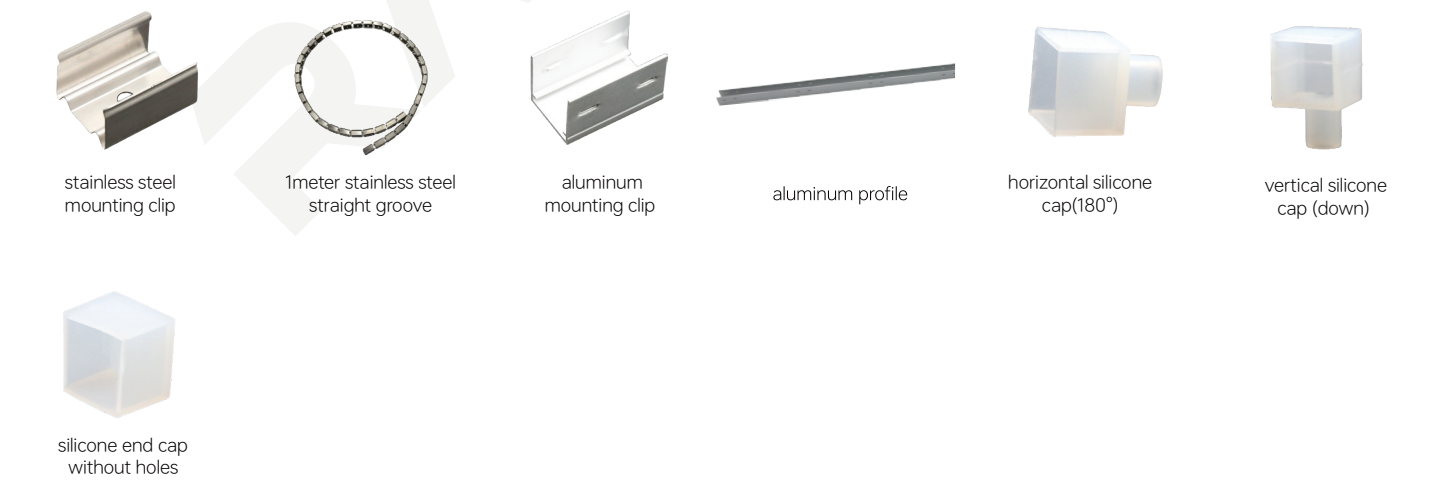


SN0815 Extrusion Digital Neon Light

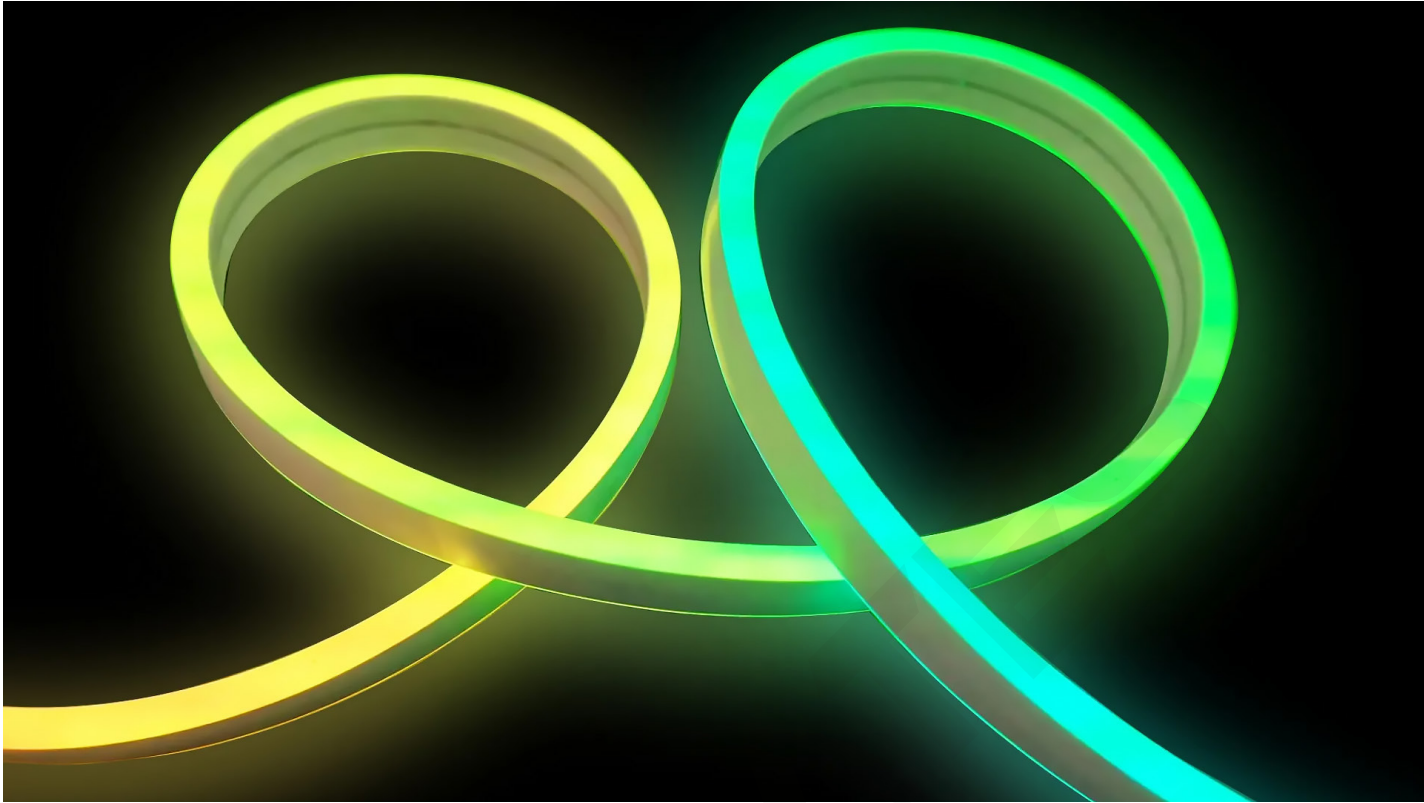


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 51.9LM G: 136.8LM B: 23.9LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 41.5LM G: 109.3LM B: 19.2LM W: 246.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 36.6LM G: 96LM B: 16.9LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 20.7LM G: 54.7LM B: 9.6LM W: 246.2LM	16.67mm


Dimension

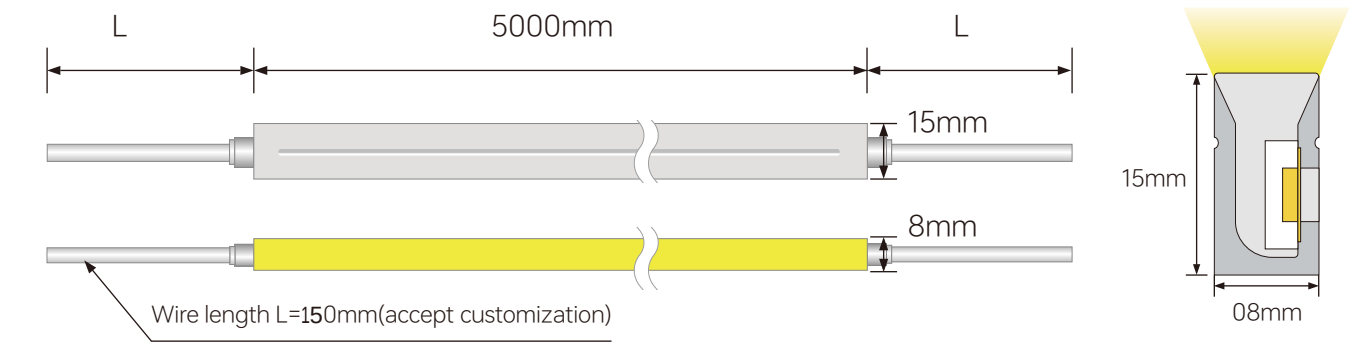


Bending

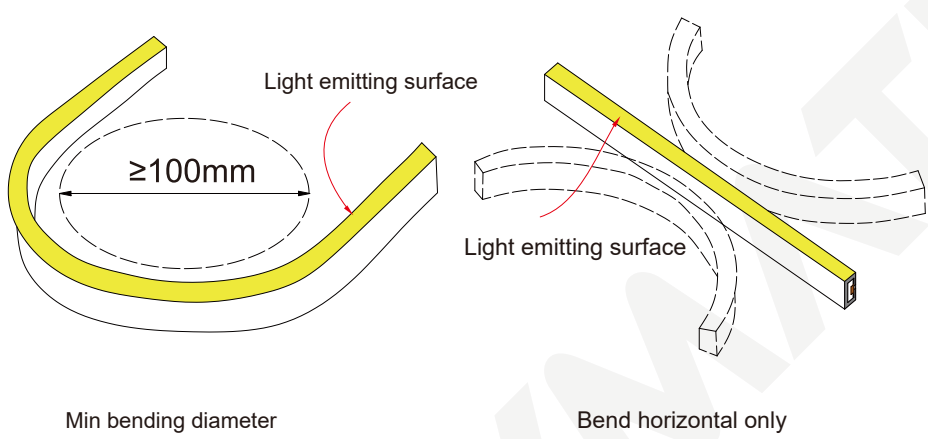


Outlet Direction

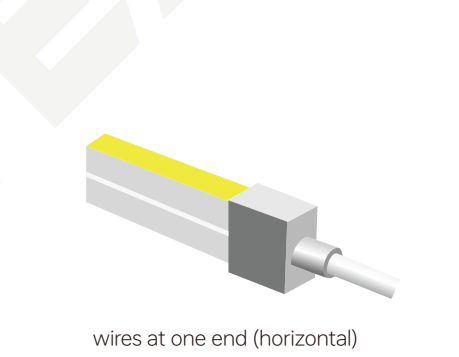

Accessories

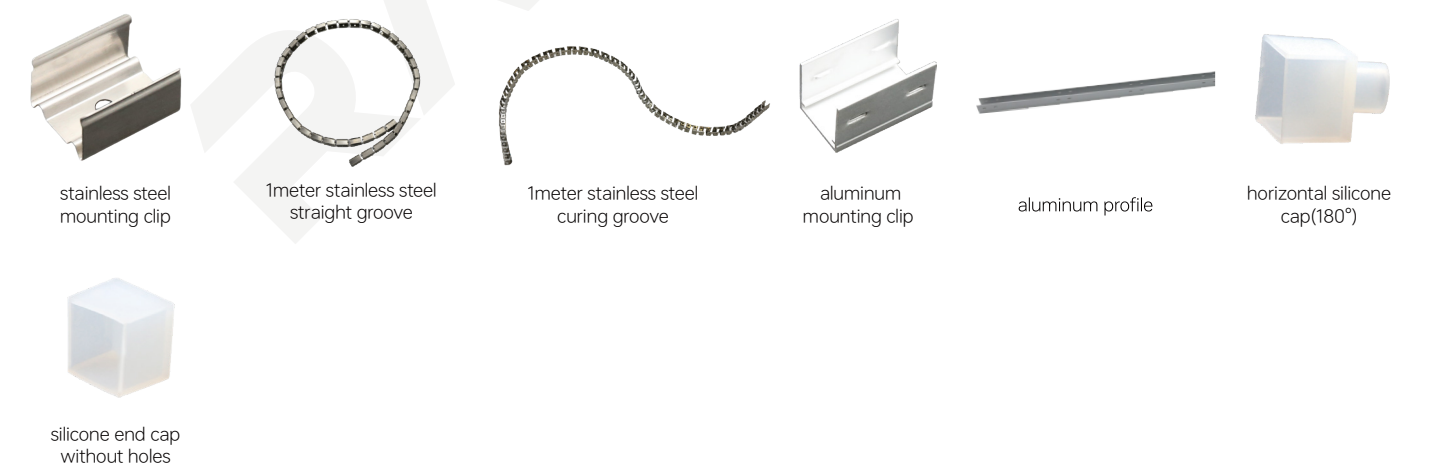


SN0816 Extrusion Digital Neon Light

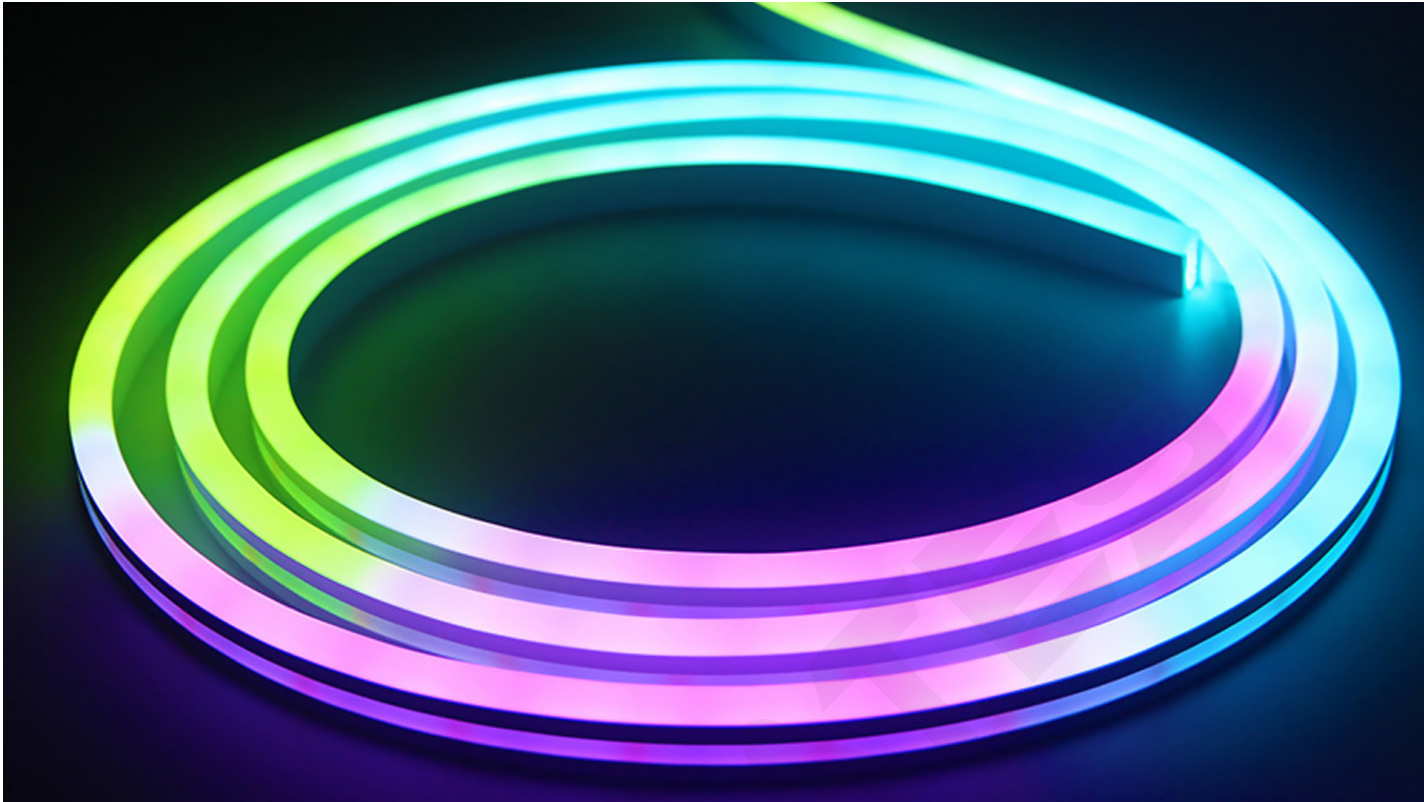


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 51.9LM G: 136.8LM B: 23.9LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 41.5LM G: 109.3LM B: 19.2LM W: 246.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 36.6LM G: 96LM B: 16.9LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 20.7LM G: 54.7LM B: 9.6LM W: 246.2LM	16.67mm


Dimension

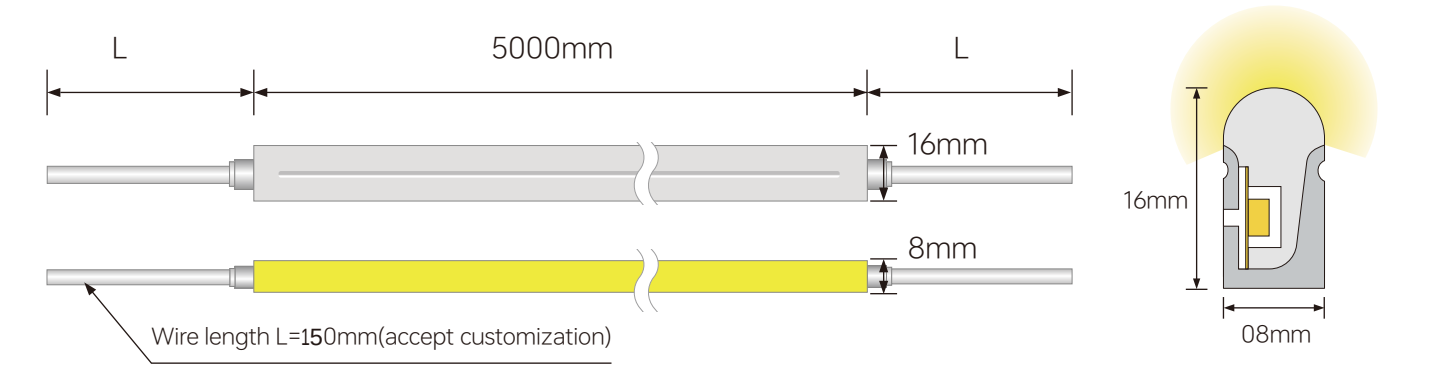


Bending

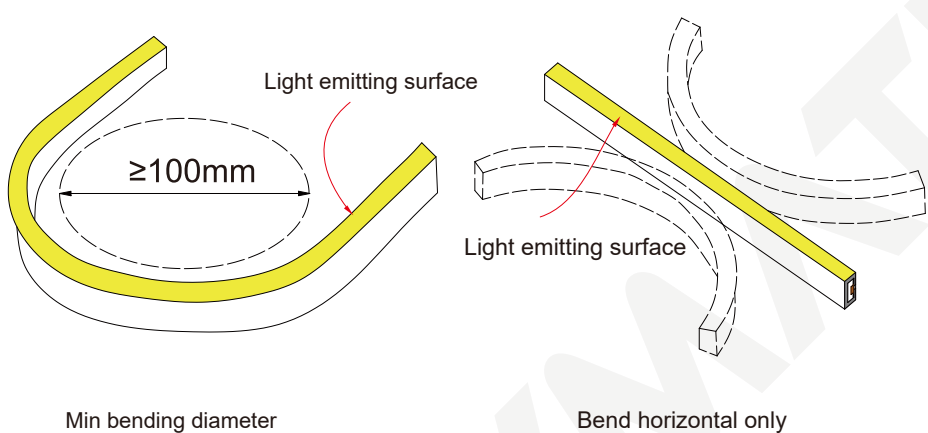


Outlet Direction

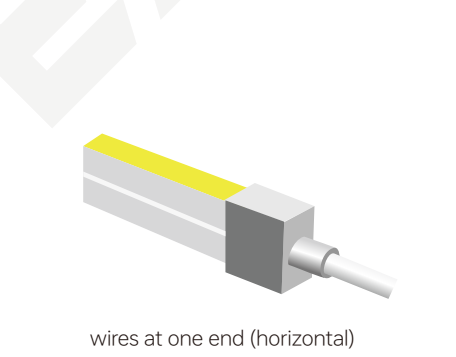

Accessories

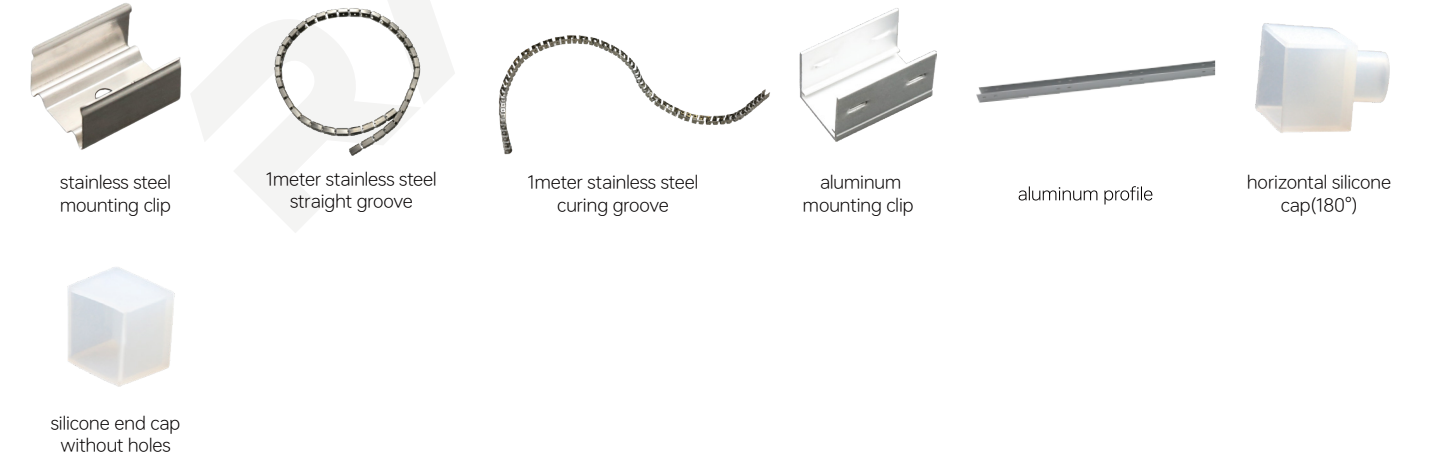


SN0817 Extrusion Digital Neon Light

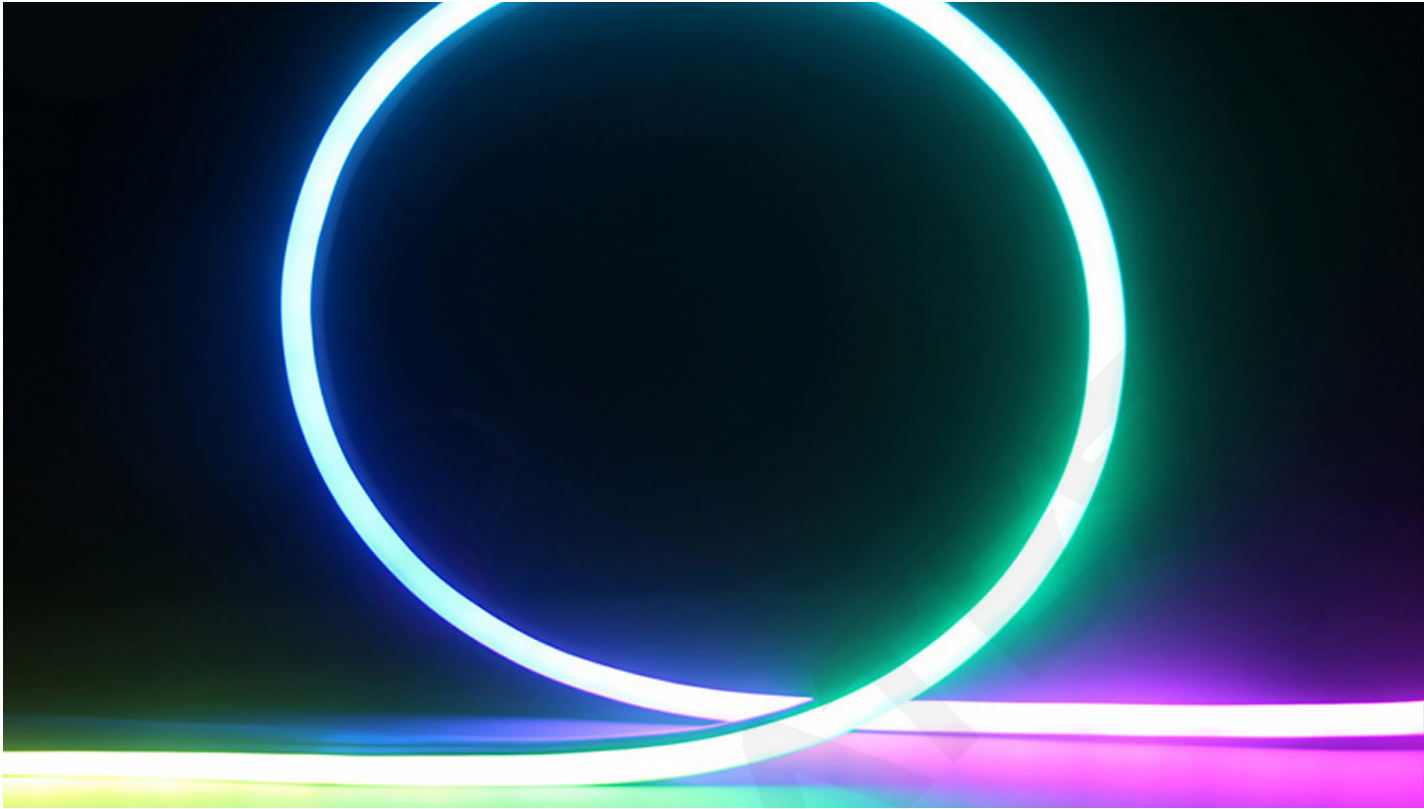


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 51.9LM G: 136.8LM B: 23.9LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 44.1LM G: 115.9LM B: 20.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 41.5LM G: 109.3LM B: 19.2LM W: 246.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 36.6LM G: 96LM B: 16.9LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 20.7LM G: 54.7LM B: 9.6LM W: 246.2LM	16.67mm

Dimension

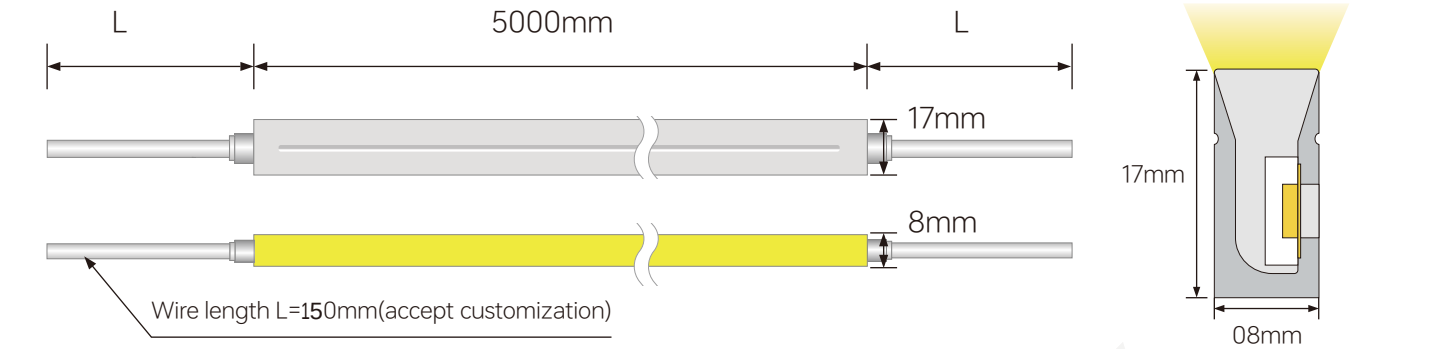


Bending

Outlet Direction

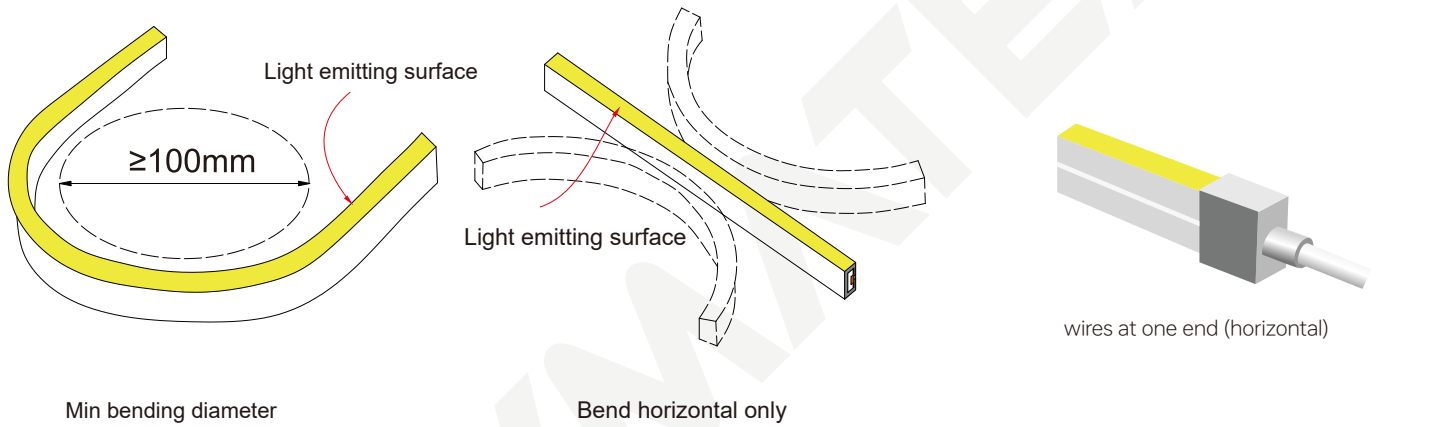

Accessories

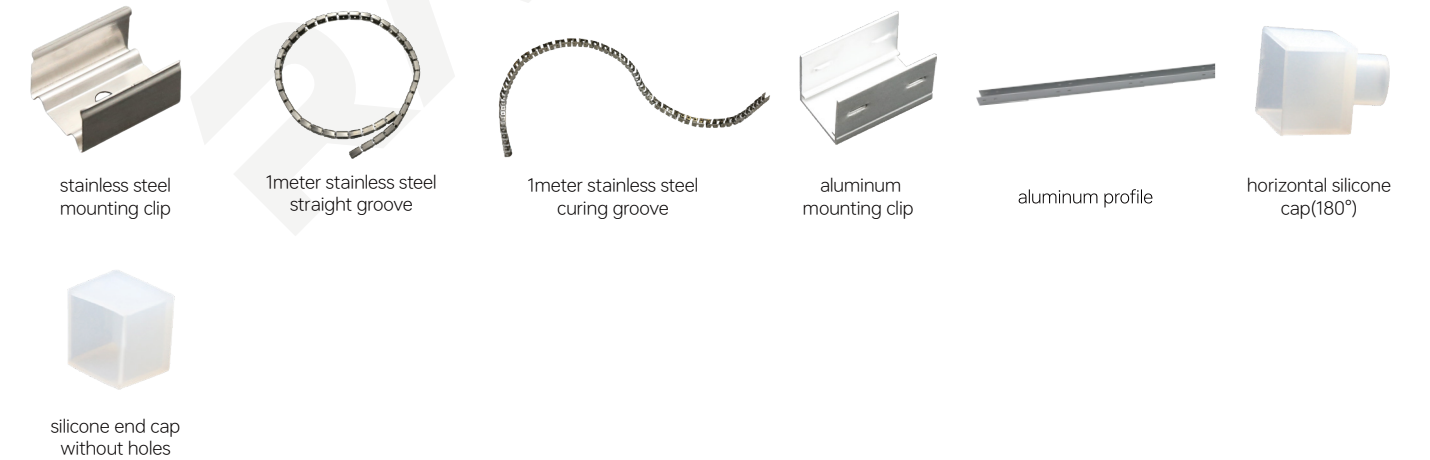


SN1010 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 54.6LM G: 144LM B: 25.2LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 46.4LM G: 122LM B: 21.4LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 43.7LM G: 115LM B: 20.2LM W: 259.2LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 38.5LM G: 101LM B: 17.8LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 21.8LM G: 57.6LM B: 10.1LM W: 259.2LM	16.67mm


Dimension

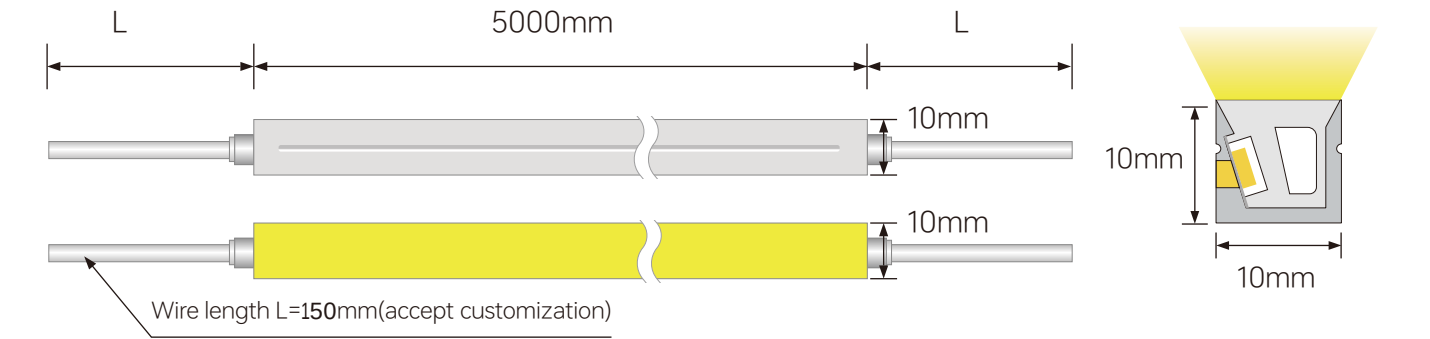


Bending

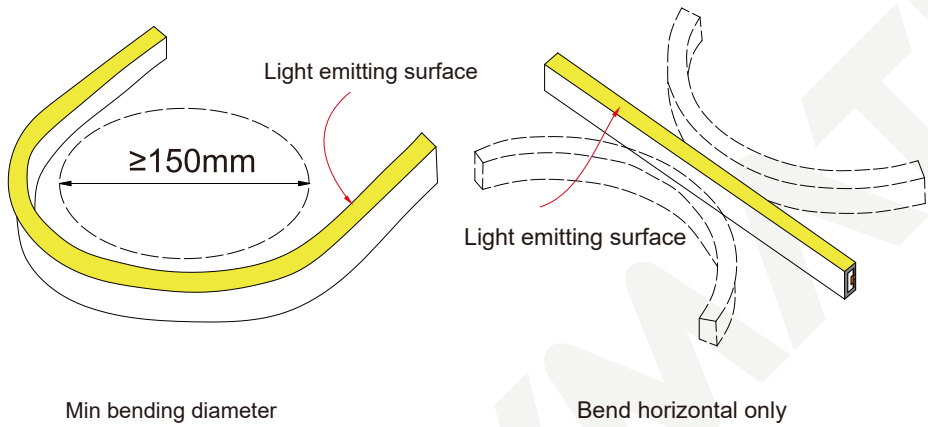


Outlet Direction

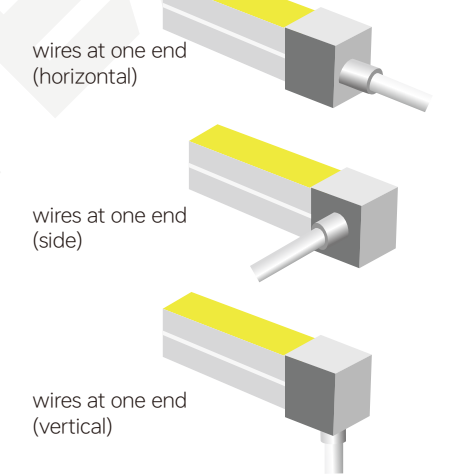

Accessories

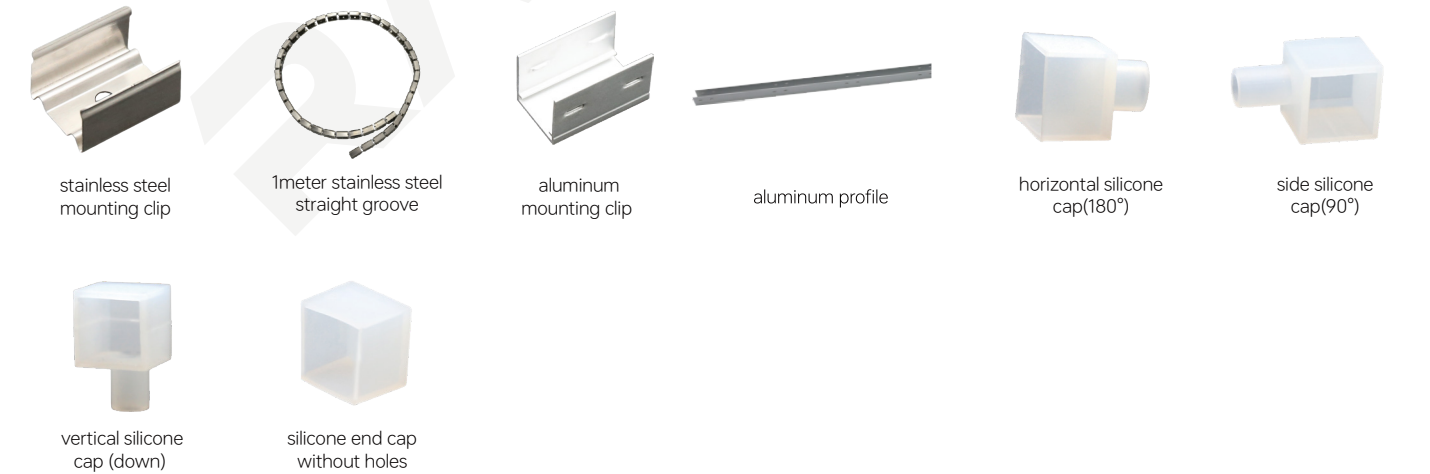


SN1018 Extrusion Digital Neon Light

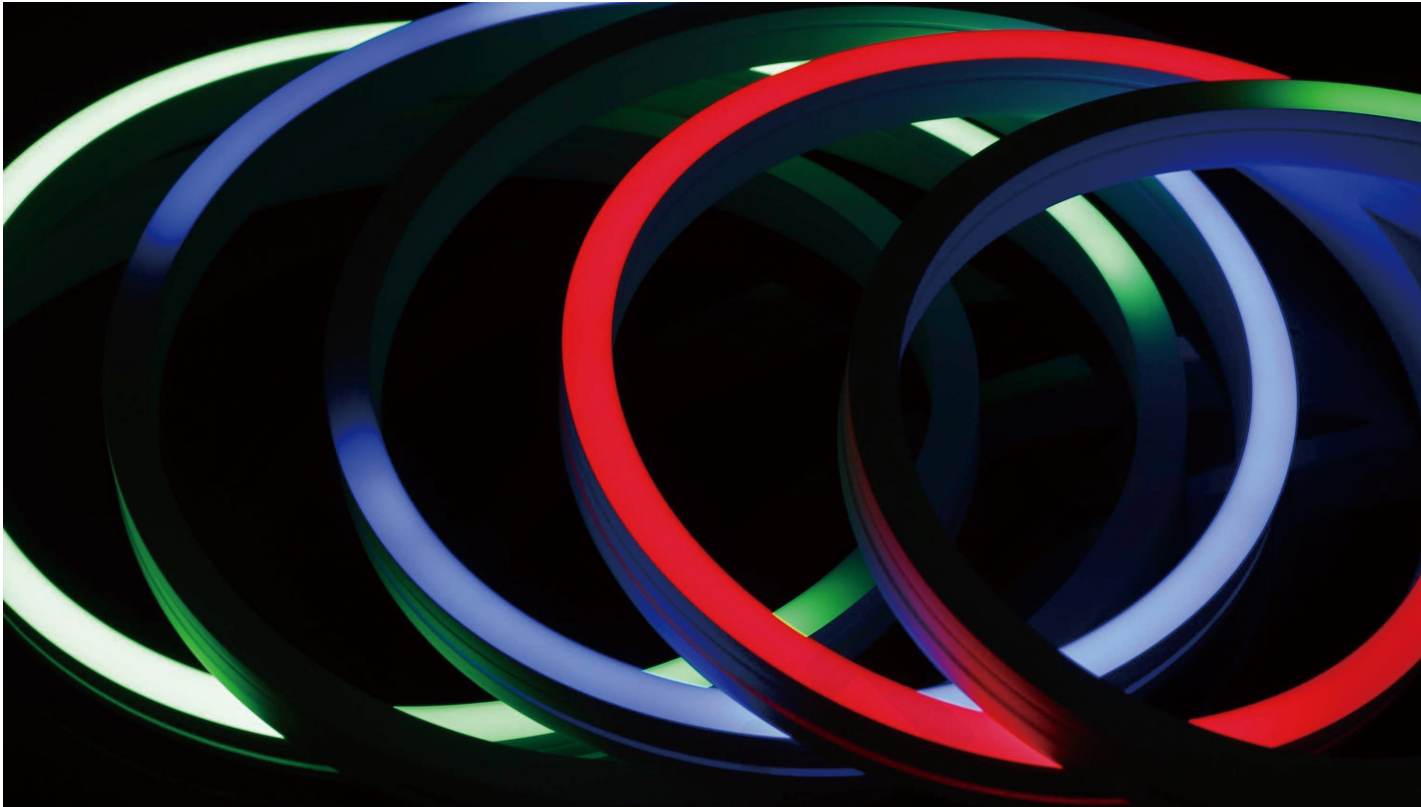


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 49.1LM G: 129.6LM B: 22.7LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 39.3LM G: 103.5LM B: 18.2LM W: 233.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 34.7LM G: 90.9LM B: 16.0LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 19.6LM G: 51.8LM B: 9.1LM W: 233.3LM	16.67mm


Dimension

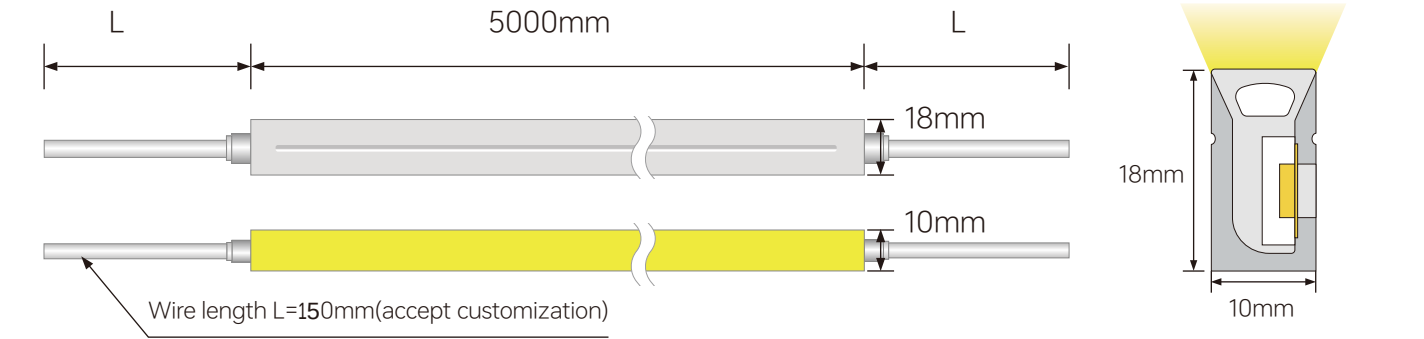


Bending

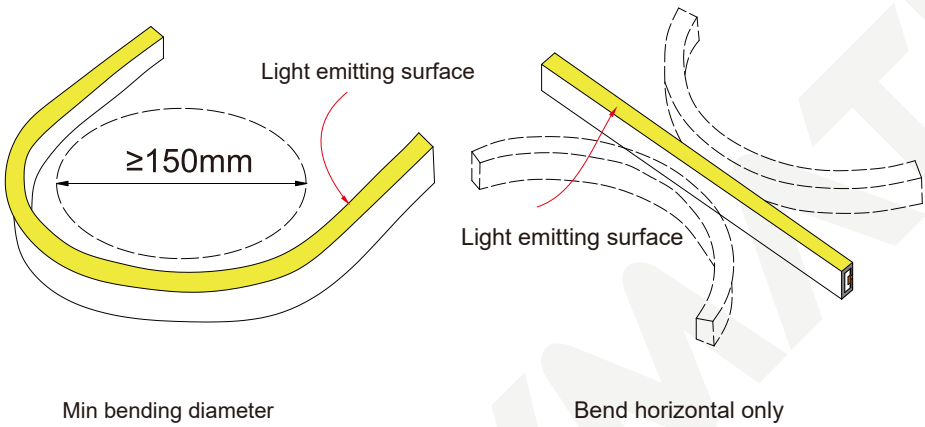


Outlet Direction

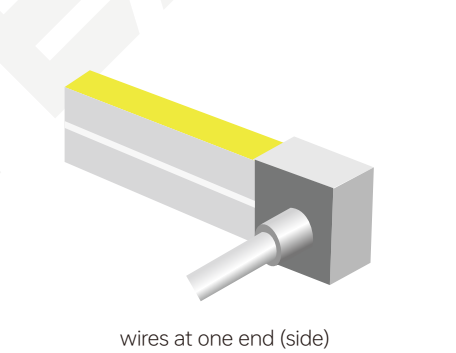

Accessories

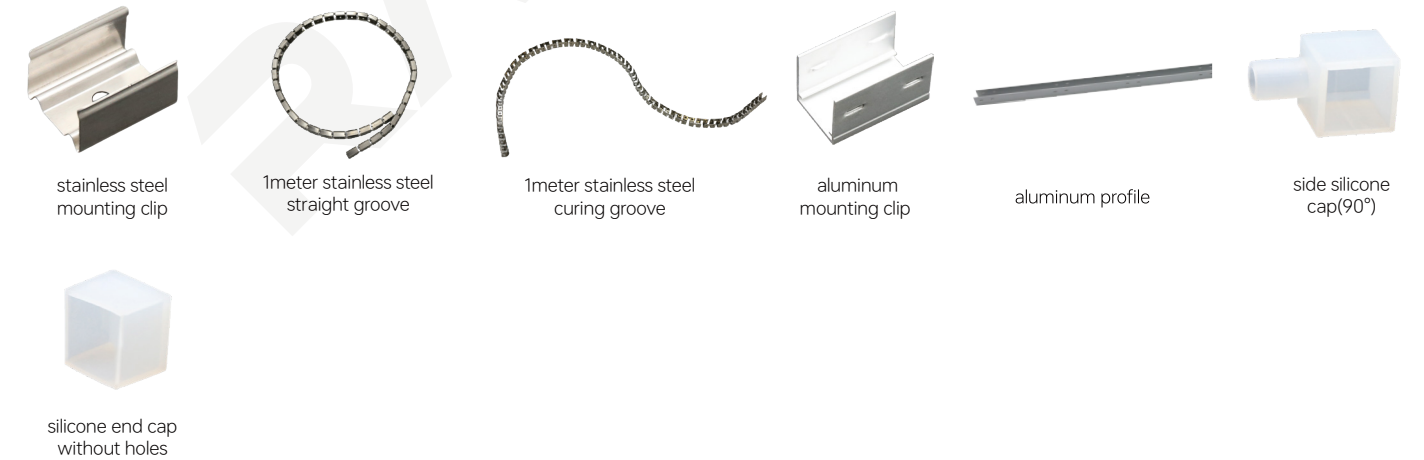


SN1020 Extrusion Digital Neon Light

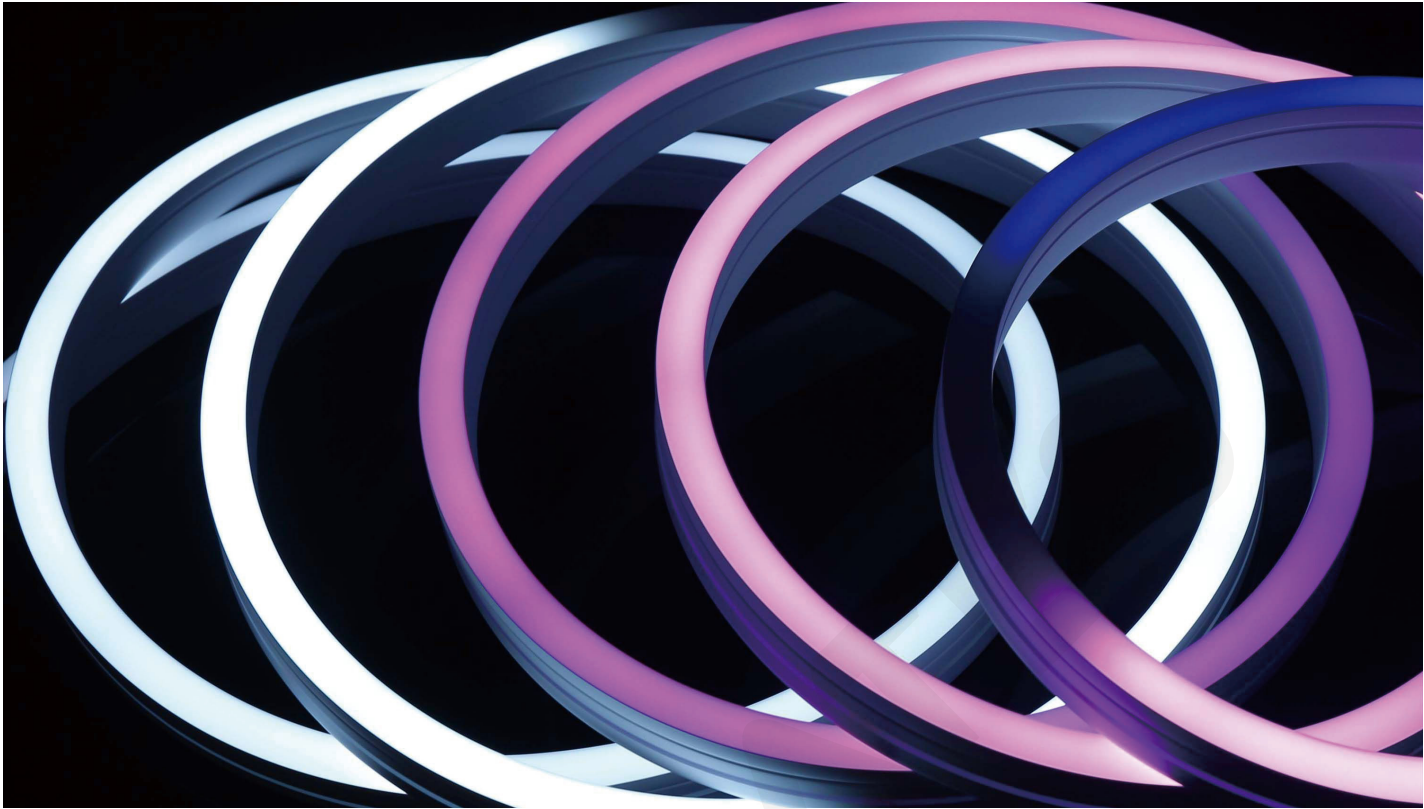


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 49.1LM G: 129.6LM B: 22.7LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 39.3LM G: 103.5LM B: 18.2LM W: 233.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 34.7LM G: 90.9LM B: 16.0LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 19.6LM G: 51.8LM B: 9.1LM W: 233.3LM	16.67mm


Dimension

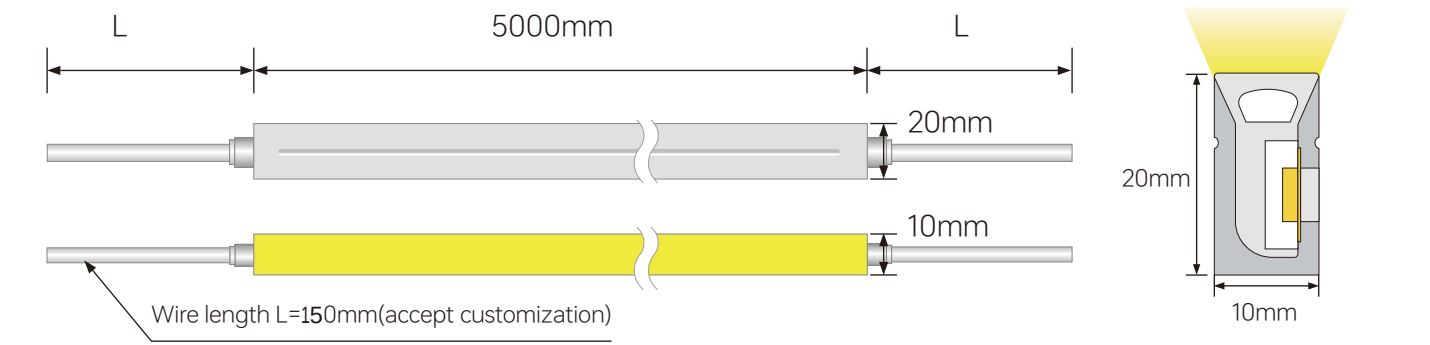


Bending

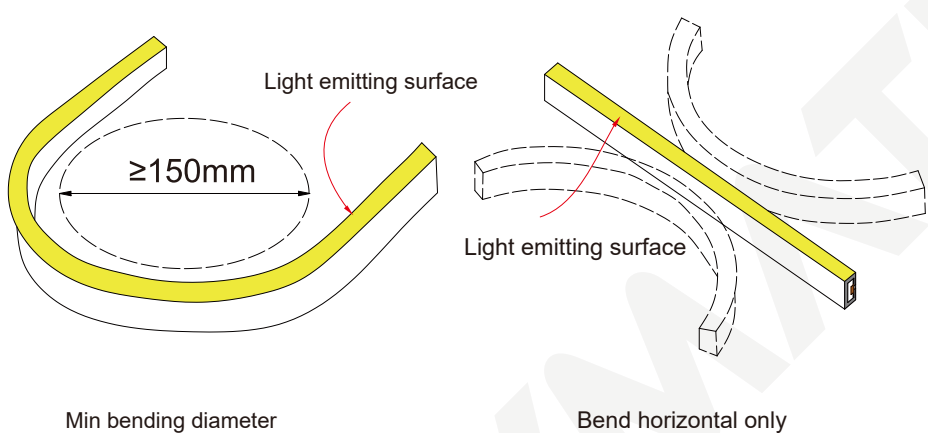


Outlet Direction

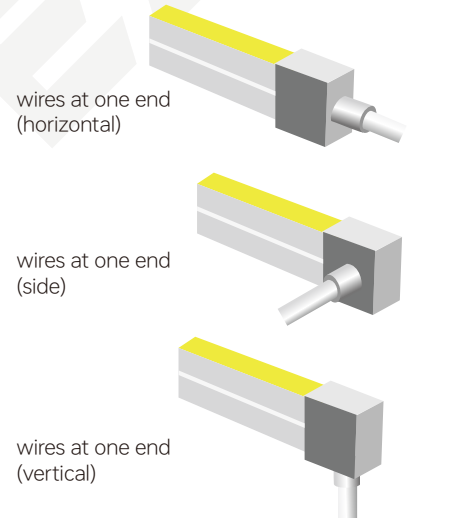

Accessories

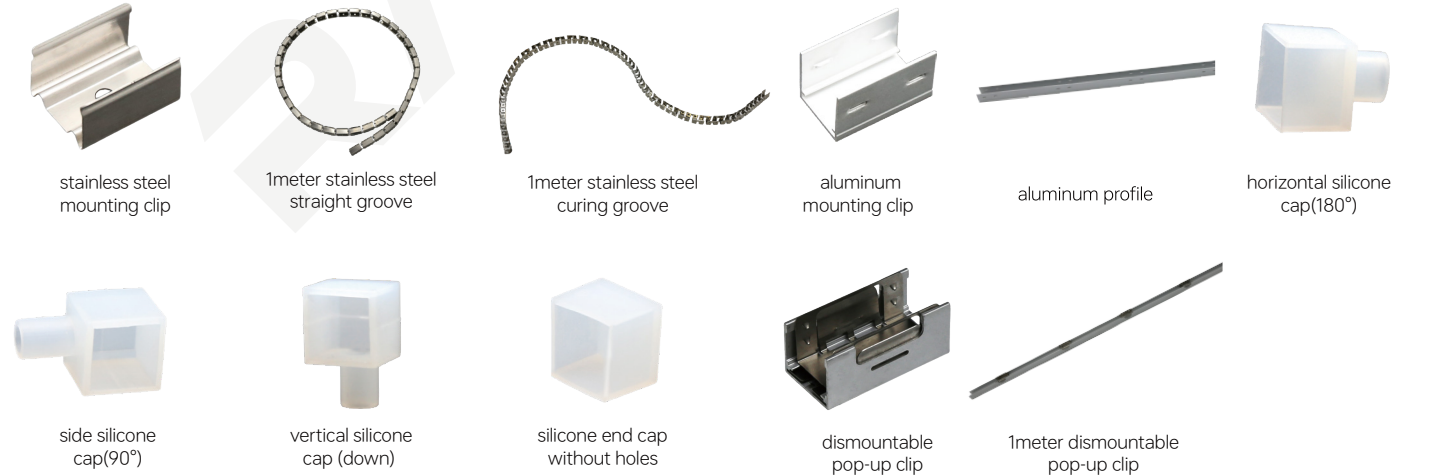


SN1022 Extrusion Digital Neon Light

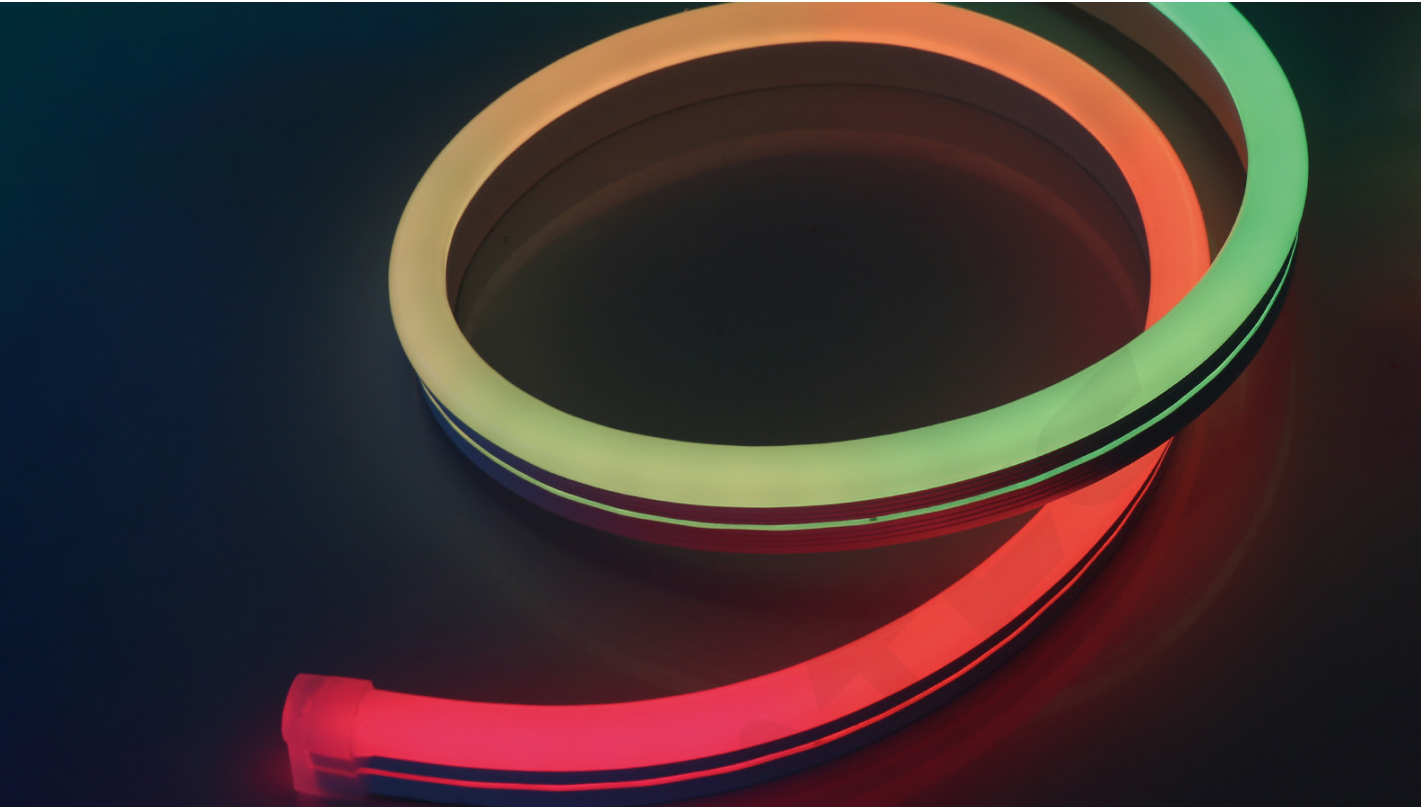


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 49.1LM G: 129.6LM B: 22.7LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 39.3LM G: 103.5LM B: 18.2LM W: 233.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 34.7LM G: 90.9LM B: 16.0LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 19.6LM G: 51.8LM B: 9.1LM W: 233.3LM	16.67mm


Dimension

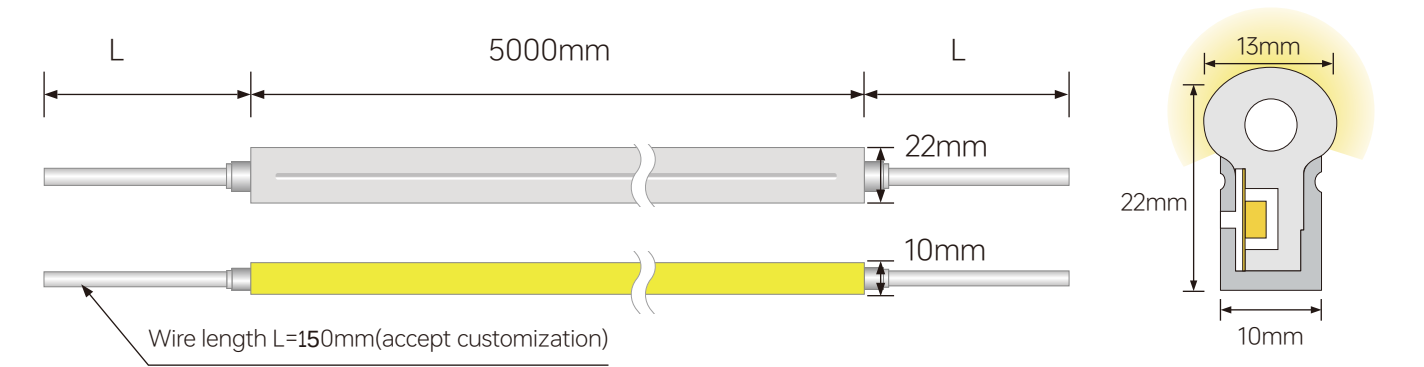


Bending

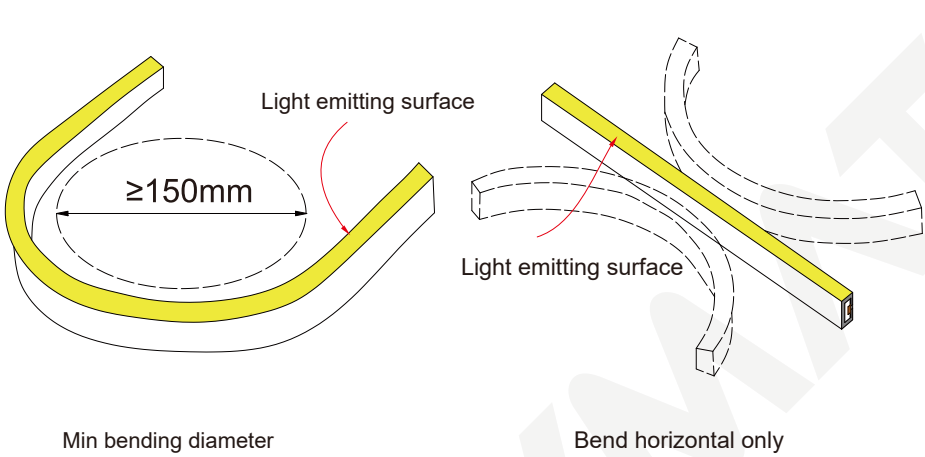


Outlet Direction

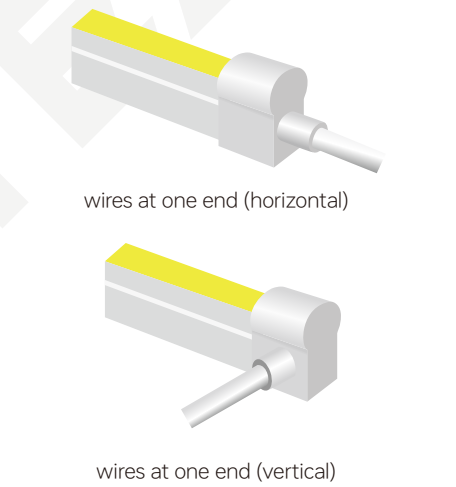

Accessories

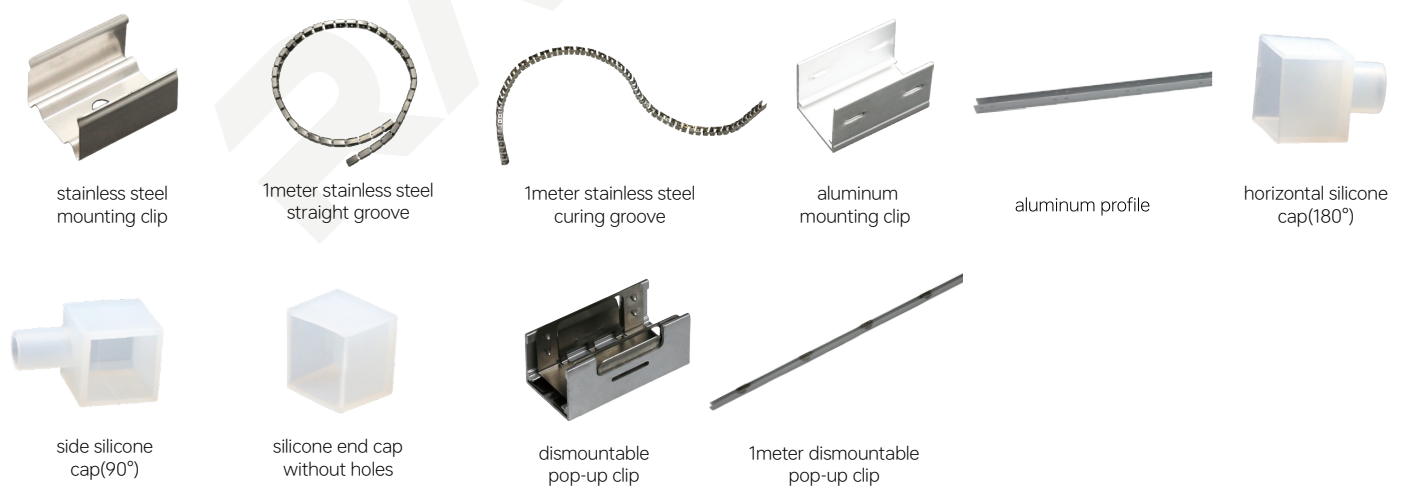


SN1225 Extrusion Digital Neon Light

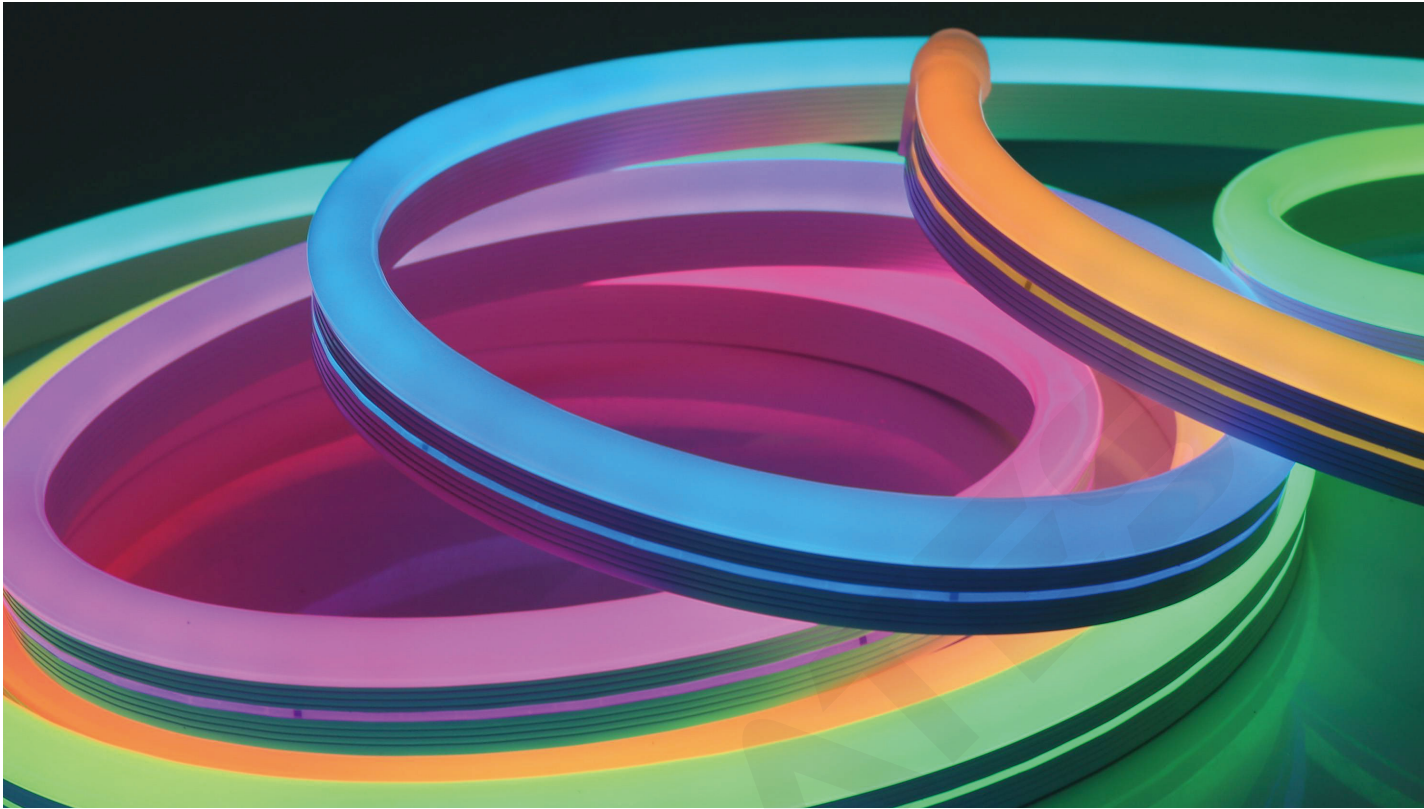


Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 46.4LM G: 122.4LM B: 21.4LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 39.4LM G: 103.7LM B: 18.2LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 39.4LM G: 103.7LM B: 18.2LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 37.1LM G: 97.8LM B: 17.2LM W: 220.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 32.7LM G: 85.9LM B: 15.1LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 18.5LM G: 49.0LM B: 8.6LM W:220.3LM	16.67mm


Dimension

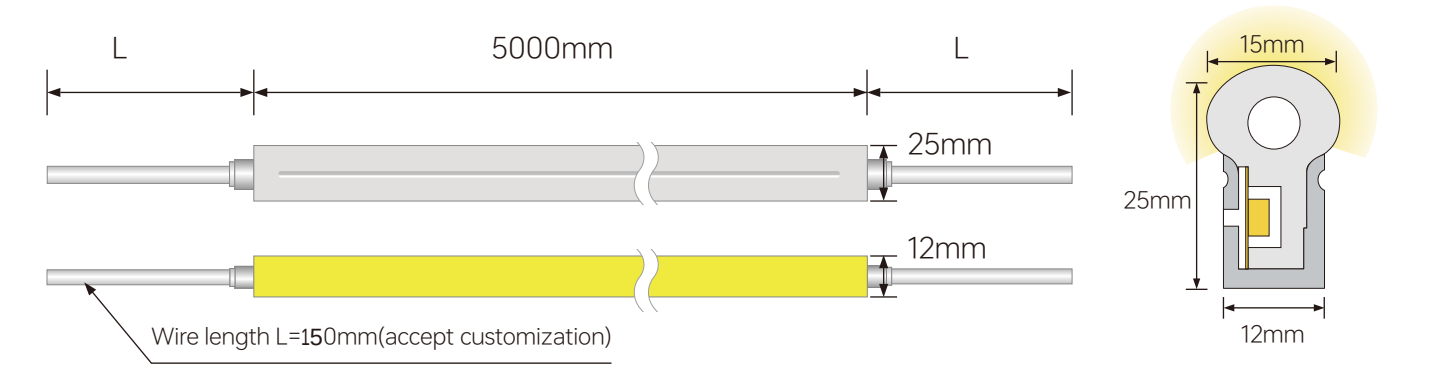


Bending

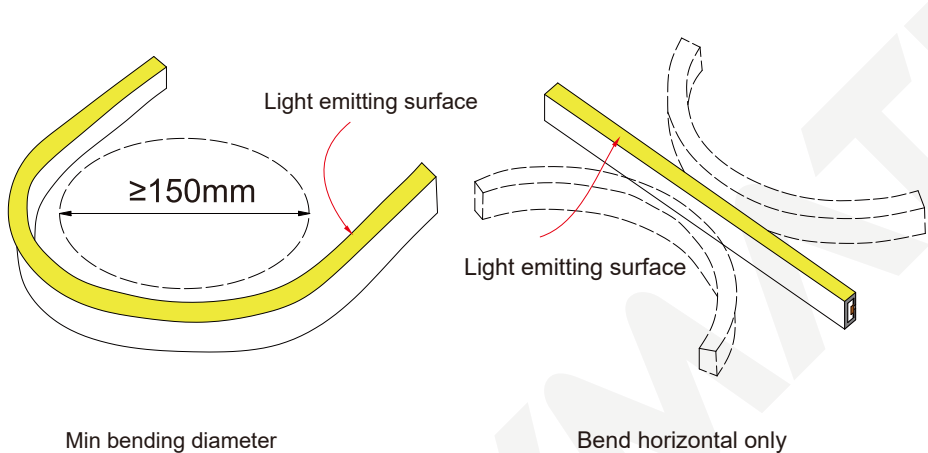

Outlet Direction

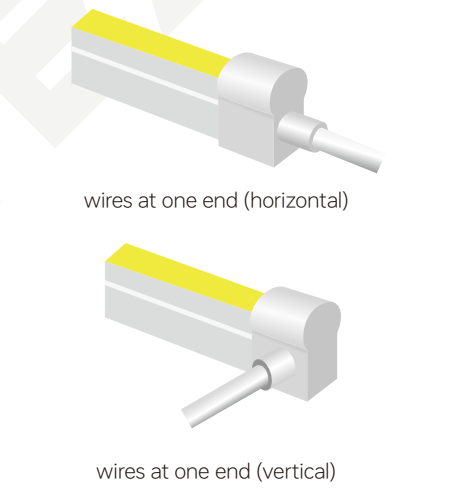

Accessories

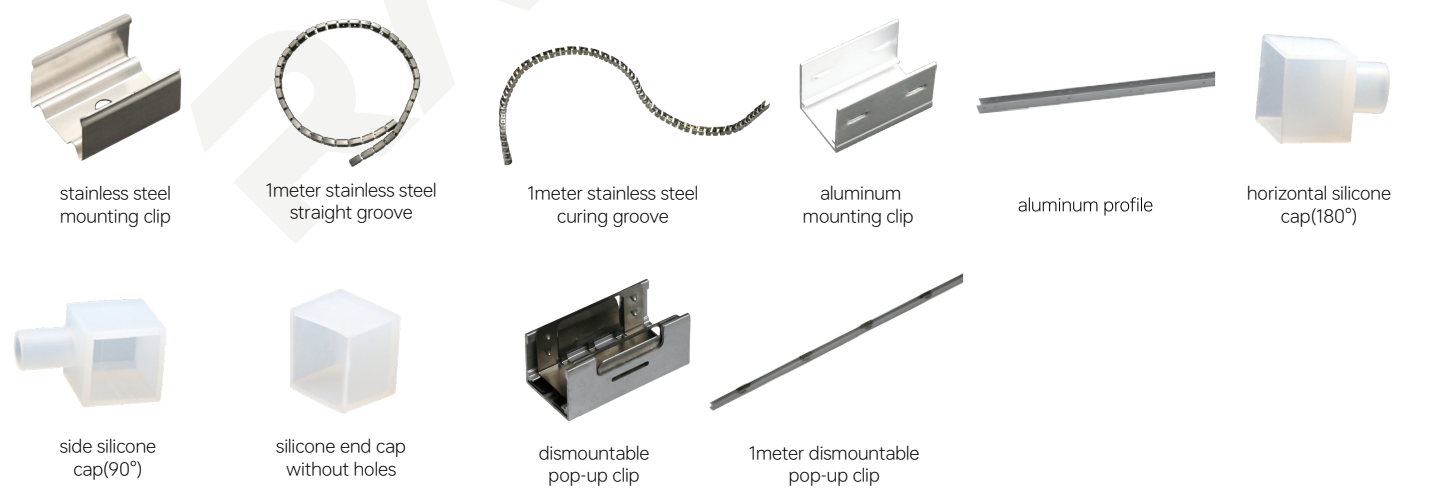


SN1515 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 491LM G: 129.6LM B: 22.7LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 41.8LM G: 109.8LM B: 19.3LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 39.3LM G: 103.5LM B: 18.2LM W: 233.3LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 34.7LM G: 90.9LM B: 16.0LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 19.6LM G: 51.8LM B: 9.1LM W: 233.3LM	16.67mm


Dimension

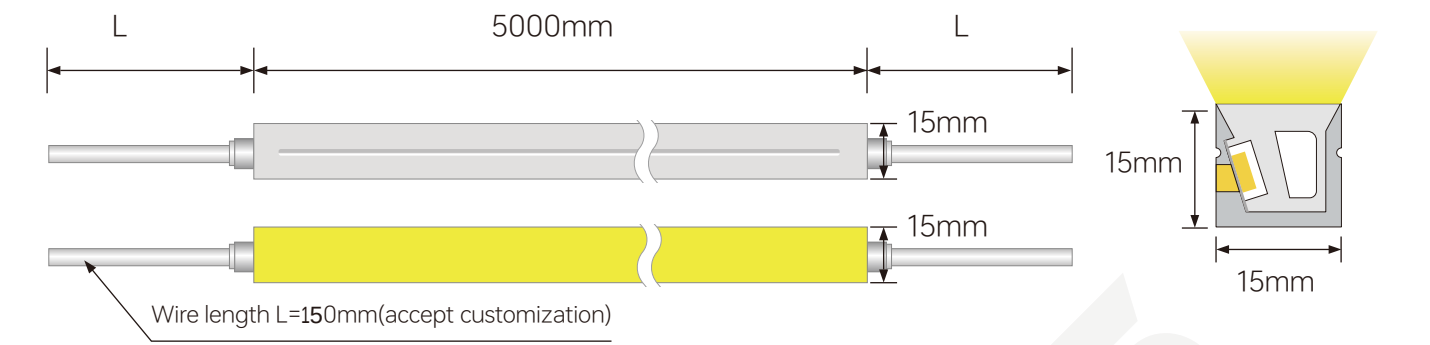


Bending

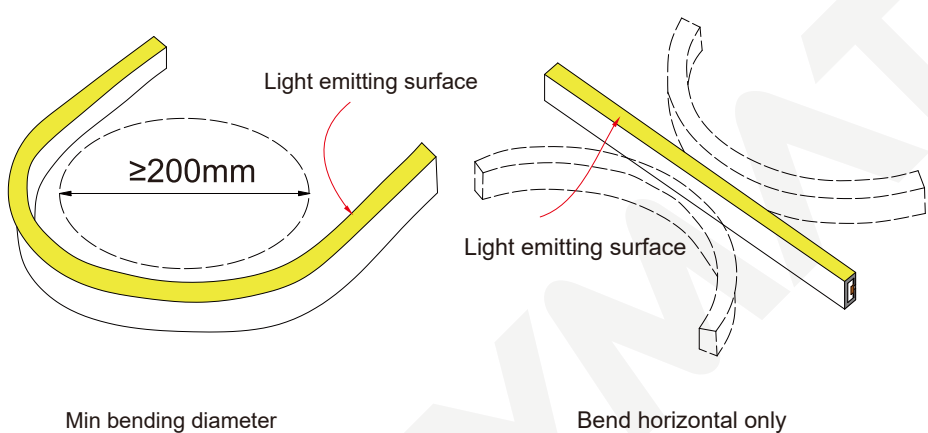

Outlet Direction

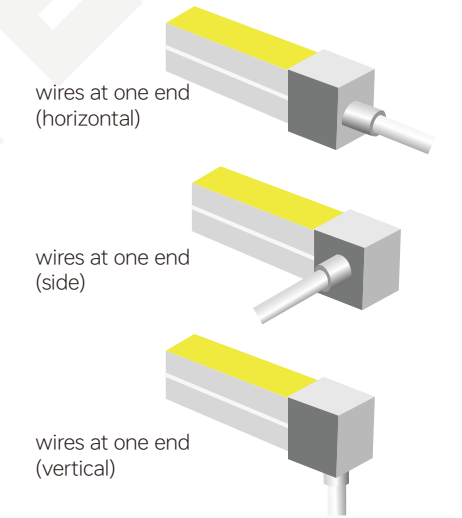

Accessories

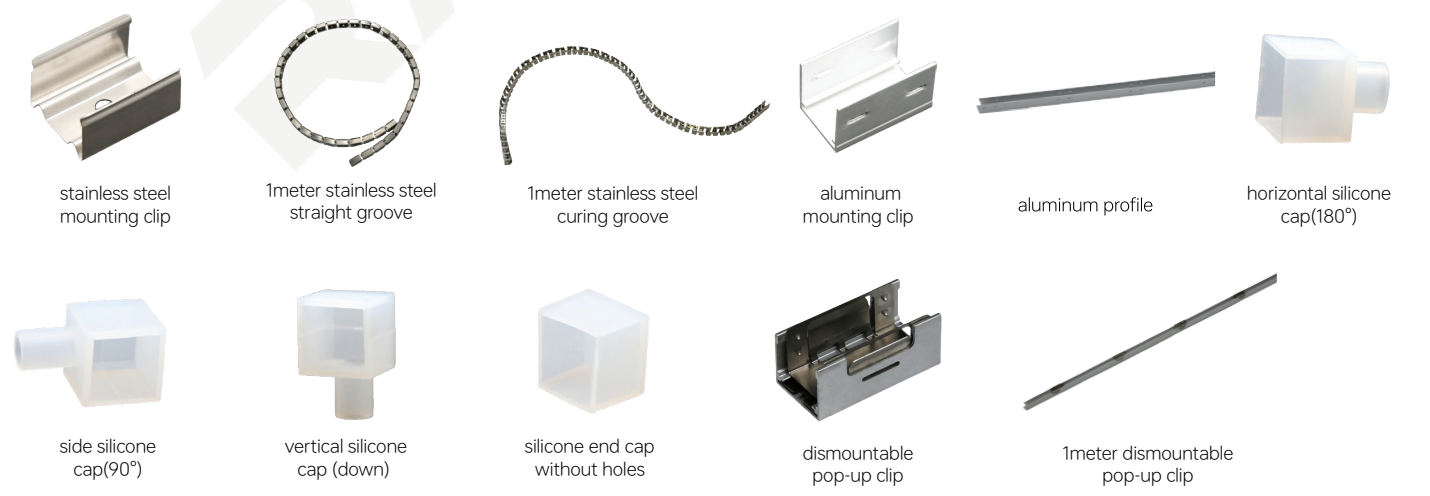


SN1616 Extrusion Digital Neon Light




Specification								
Signal type	IC	LED	LED QTY	Color	Voltage	Power (W/M)	Lumen LM/M	Cut
DMX512	TM512AC	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	14.4W	R: 48LM G: 126.7LM B: 22.2LM	100mm
Breakpoint continuation	WS2818	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 40.8LM G: 107.4LM B: 18.8LM	100mm
SPI	SM16703	5050RGB	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC24V	11.5W	R: 40.8LM G: 107.4LM B: 18.8LM	100mm
SPI	WS2814	5050RGBW (4 in 1 LED)	10pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC24V	15.4W	R: 38.5LM G: 101.2LM B: 17.8LM W: 228.1LM	100mm
SPI	WS2812	5050RGB	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm	DC5V	10.8W	R: 33.9LM G: 88.9LM B: 15.7LM	16.67mm
SPI	1877A	5050RGBW (4 in 1 LED)	60pixel 60LEDs	Red:620-625nm Green:515-525nm Blue:460-465nm White:6000K	DC5V	12W	R: 19.2LM G: 50.7LM B: 8.9LM W: 228.1LM	16.67mm


Dimension

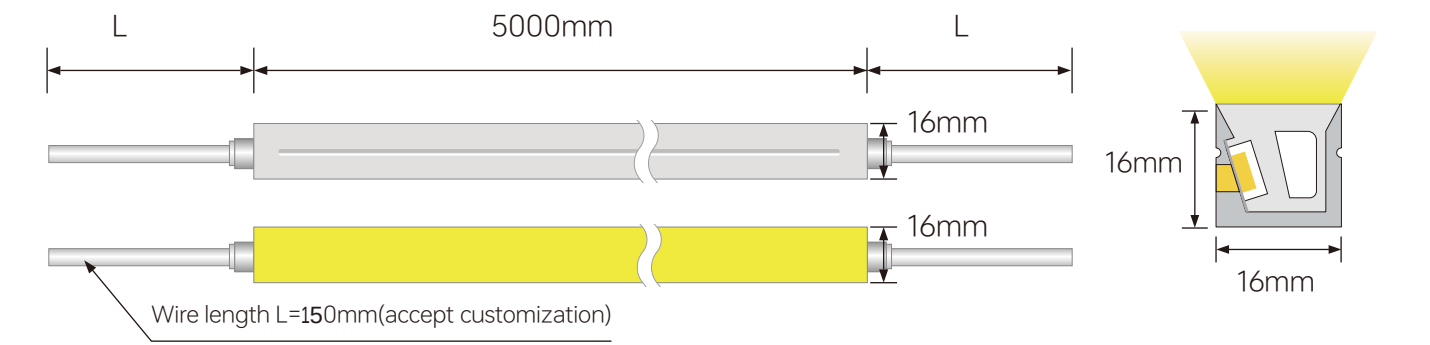

Bending

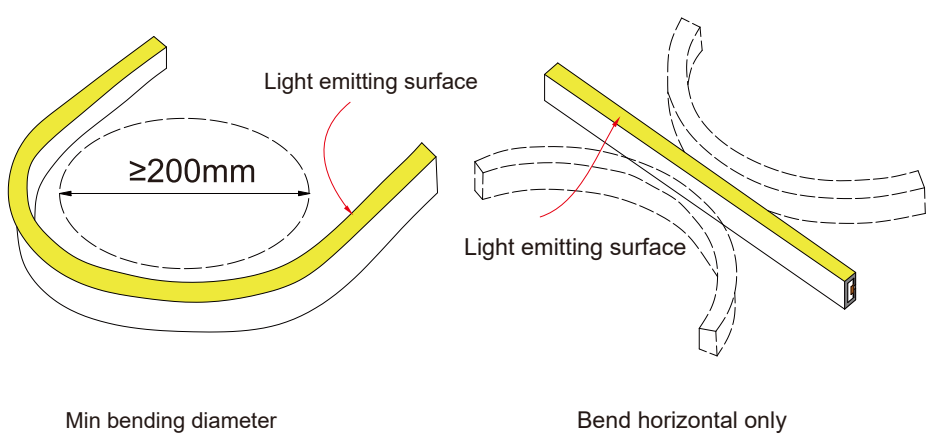

Outlet Direction

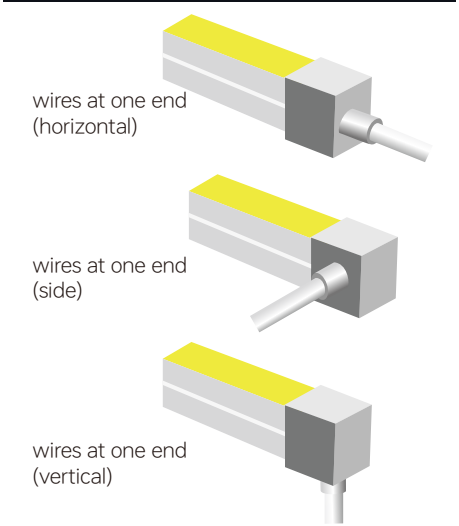

Accessories

